



ELEVEN

633.10.333.xxx

Single lever washbasin mixer 1/2"



- spout projection 136 mm
- height 128 mm
- aerator M24x1, adjustable
- cartridge with ceramic discs 1/2"
- lift rod and pop-up waste 1 1/4"
- 2 pressure hoses M8x1 x 3/8" x 450 mm
- acoustic group I

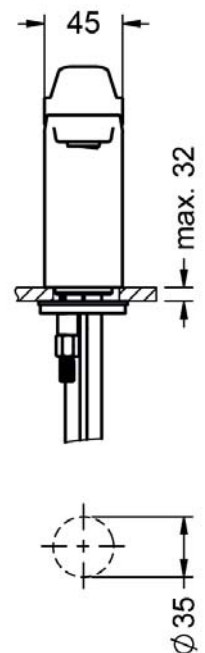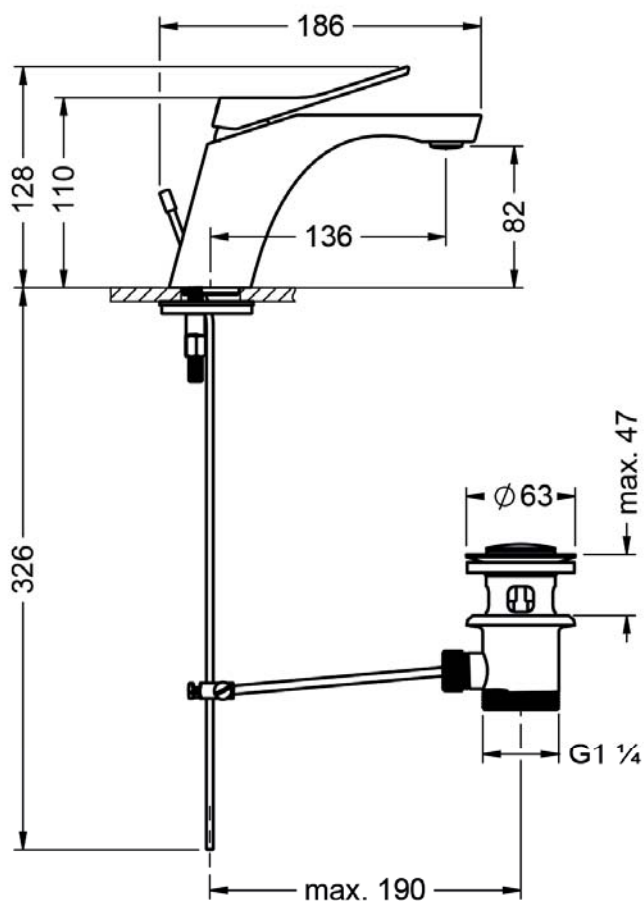




ELEVEN

633.10.334.xxx

Single lever washbasin mixer 1/2"



- spout projection 136 mm
- height 128 mm
- aerator M24 x 1, adjustable
- cartridge with ceramic discs 1/2"
- without pop-up waste
- 2 pressure hoses M8x1 x 3/8" x 450 mm
- acoustic group I

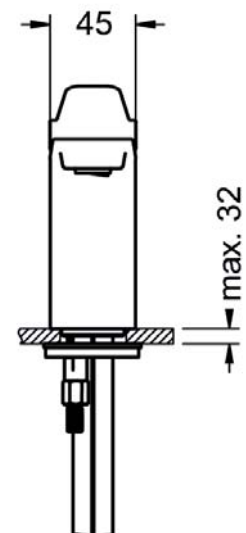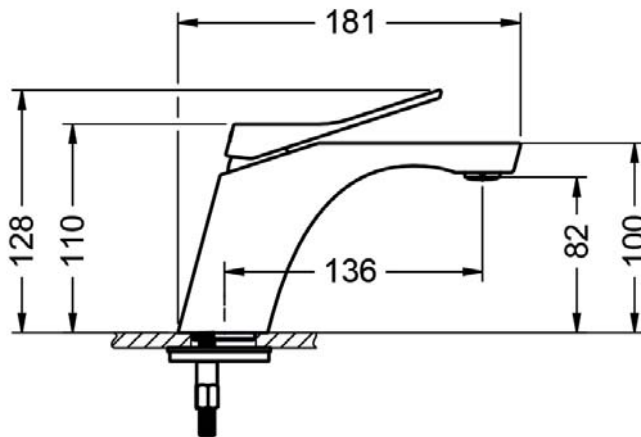


ELEVEN

633.10.335.xxx

Single lever washbasin mixer ½", XL



- spout projection 173 mm
- total height 188 mm
- aerator M24 x 1 with adjustable stream
- cartridge with ceramic discs ½"
- lift rod and pop-up waste 1 ¼"
- 2 pressure hoses M8x1 x ¾" x 450 mm
- acoustic group I

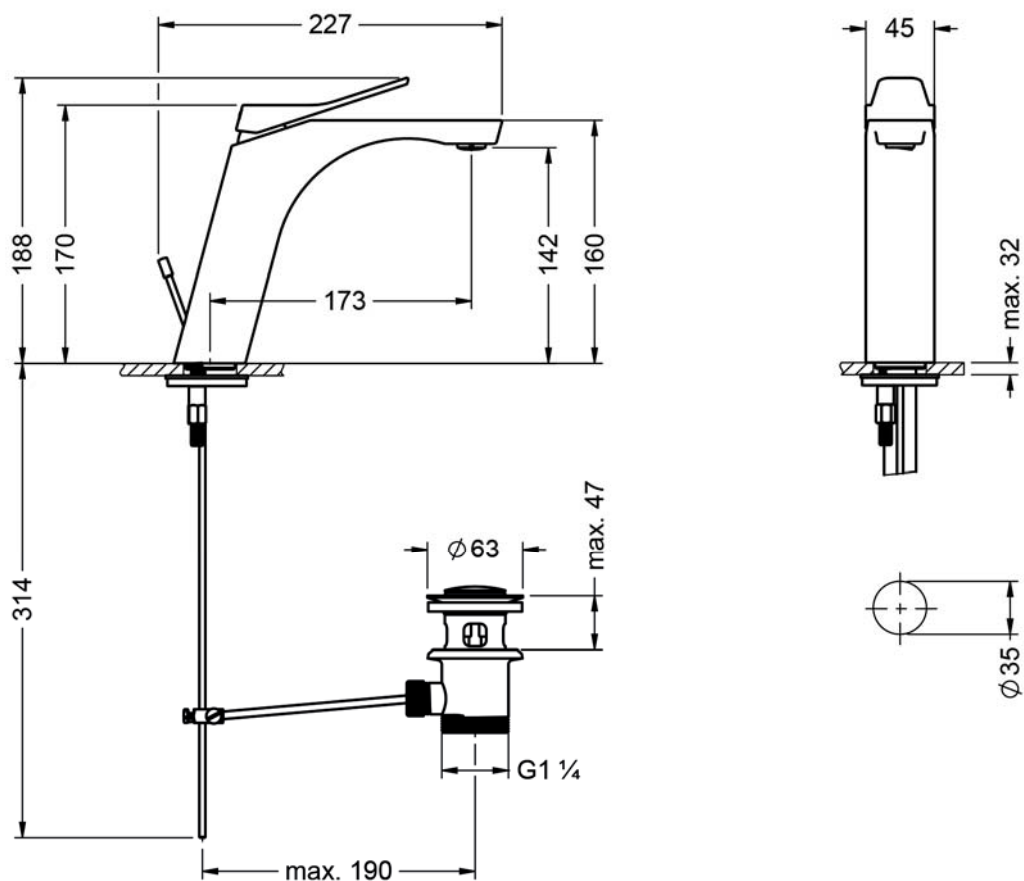




ELEVEN

633.10.336.xxx

Single lever washbasin mixer 1/2", XL



- spout projection 173 mm
- total height 188 mm
- aerator M24 x 1 with adjustable stream
- cartridge with ceramic discs 1/2"
- without pop-up waste
- 2 pressure hoses M8x1 x 3/8" x 450 mm
- acoustic group I

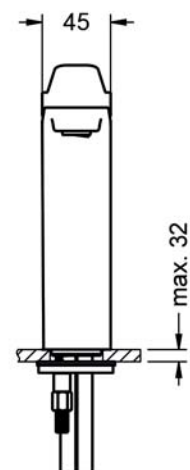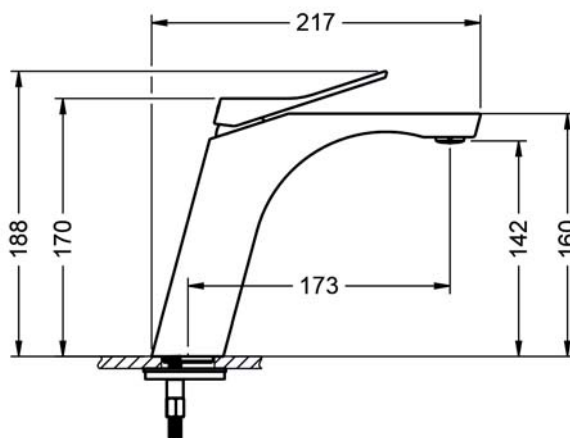




ELEVEN

633.10.332.xxx

Single lever washbasin mixer 1/2", XXL



- spout projection 194 mm
- height 268 mm
- aerator M24 x 1, adjustable
- cartridge with ceramic discs 1/2"
- without pop-up waste
- 2 pressure hoses M8x1 x 3/8" x 600 mm
- acoustic group I

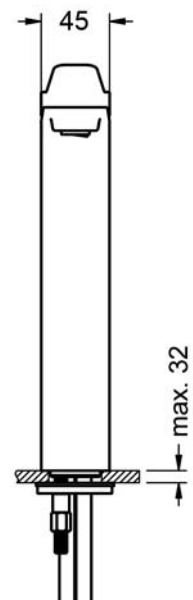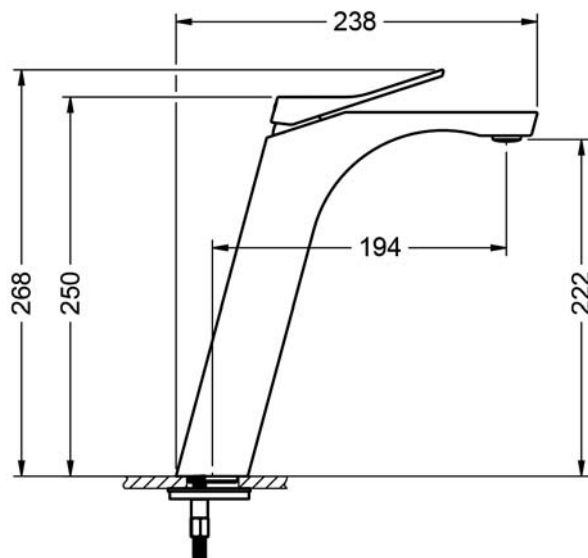

ELEVEN

633.20.360.xxx



Single lever wall washbasin mixer, assembly set ½"




- wall mounting
- projection 189 mm
- wall spout
- aerator M24 x 1, adjustable
- cartridge with ceramic discs ½"
- escutcheon

Required:

- **649.20.362.000** | Single lever wall washbasin mixer ½", concealed body, control lever on the right
- **649.20.364.000** | Single lever wall washbasin mixer ½", concealed body, control lever on the left

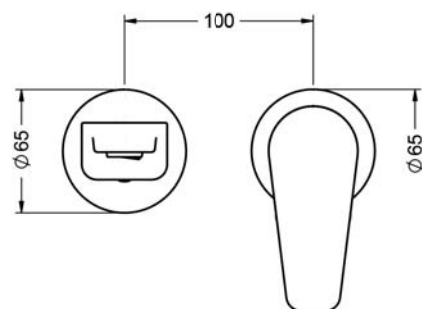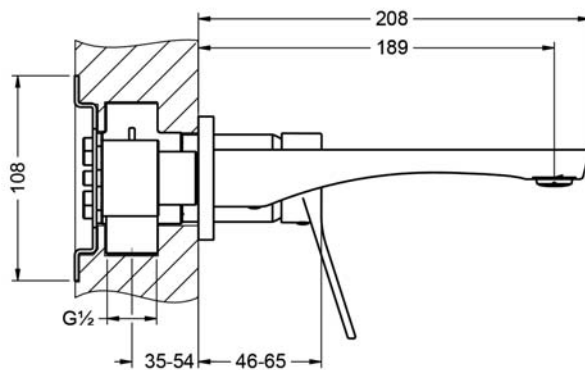

mit Einbaukörper / with concealed body 649.20.362.000

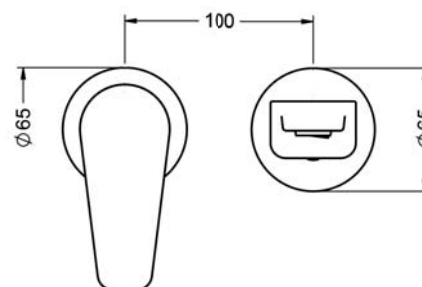



mit Einbaukörper / with concealed body 649.20.364.000

ELEVEN

649.20.362.000

Single lever wall washbasin mixer ½", concealed body

- control lever on the right
- single handle operation
- for assembly set XXX.20.360.xxx and XXX.20.365.xxx
- cartridge with ceramic discs ½"

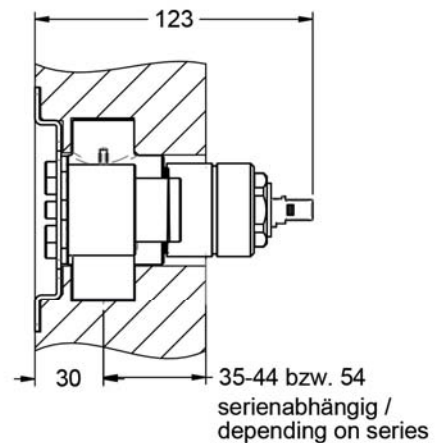
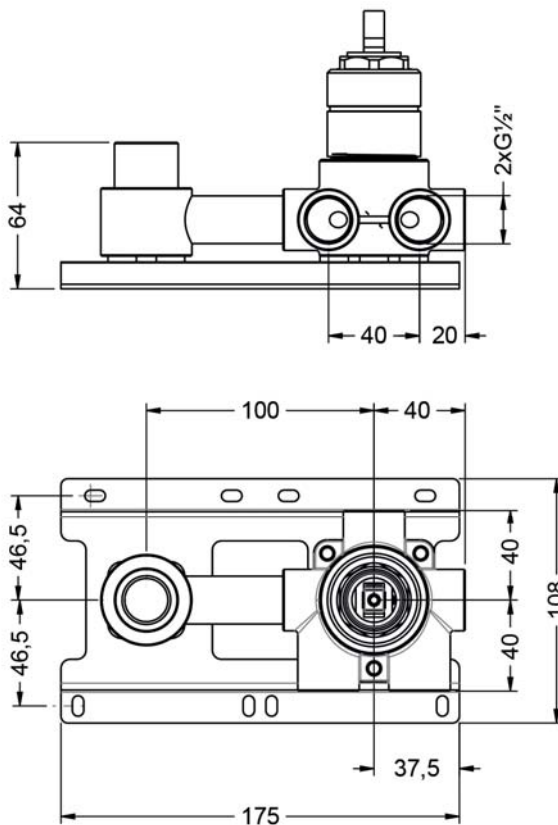


ELEVEN

649.20.364.000

Single lever wall washbasin mixer ½", concealed body

- control lever on the left
- single handle operation
- for assembly set XXX.20.360.xxx and XXX.20.365.xxx
- cartridge with ceramic discs ½"

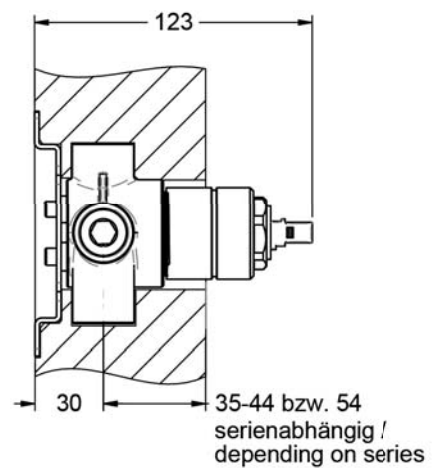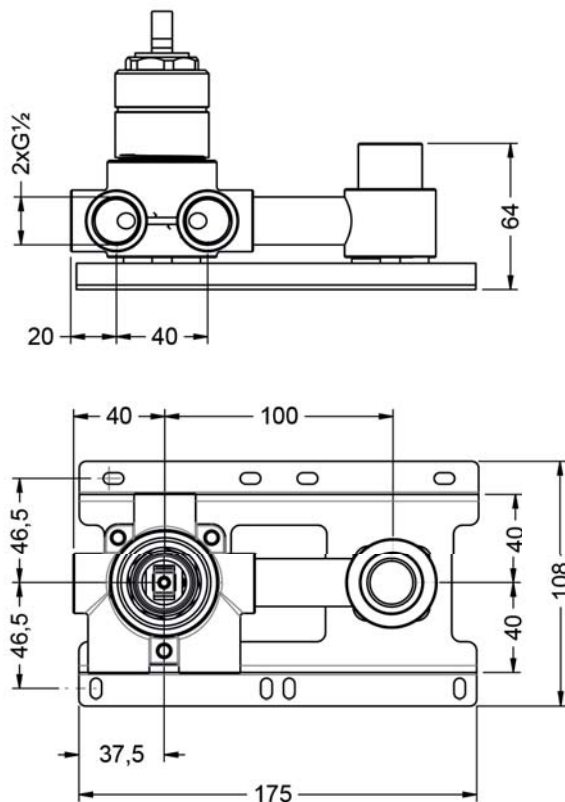


ELEVEN

633.10.111.xxx

Single lever bidet mixer 1/2"



- spout projection 160 mm
- height 128 mm
- aerator M18,5 x 1 with ball joint
- cartridge with ceramic discs 1/2"
- lift rod and pop-up waste 1 1/4"
- 2 pressure hoses M8x1 x 3/8" x 450 mm

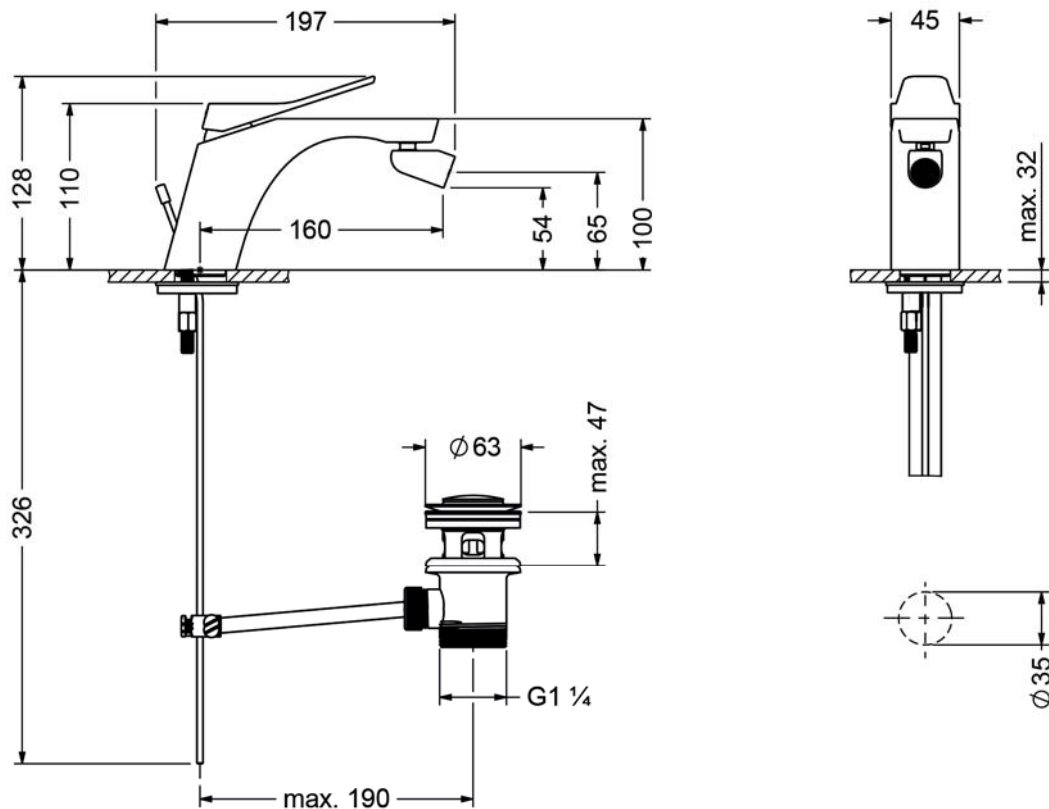


ELEVEN

632.12.100.xxx

Angle valve 1/2"



- wall mounting
- spout projection 105 mm
- cartridge 1/2"
- compression joint 1/2"
- escutcheon

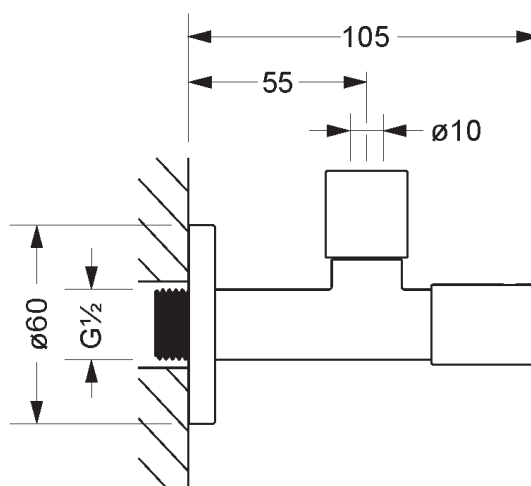


ELEVEN

649.15.340.xxx

Washbasin cupped siphon trap 1 1/4"

- wall mounting
- heavy metal
- escutcheon
- outlet tube ø 32 mm
- siphon depth 165 mm

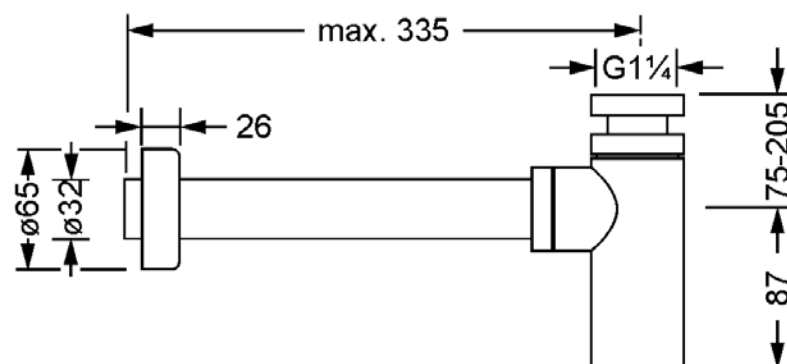


ELEVEN

649.15.270.xxx

Restraint drain/waste 1 1/4"

- length of shaft 70 mm
- for washbasins without overflow

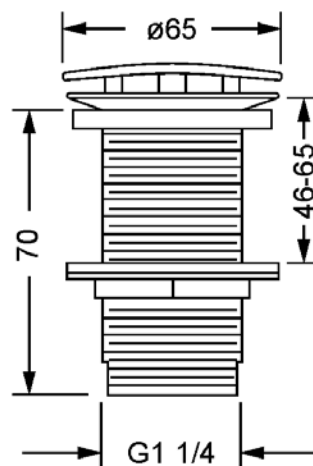


ELEVEN

649.15.271.xxx

Restraint drain/waste 1 1/4"

- length of shaft 100 mm
- for washbasins without overflow

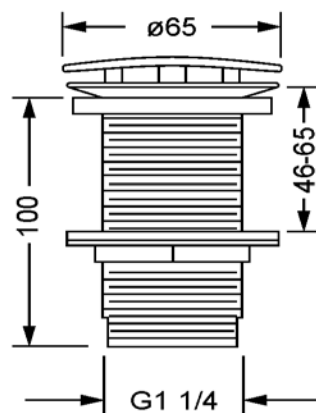





ELEVEN

633.20.500.xxx

Exposed tub/shower mixer, inclusive shower set ½"



- wall mounting
- spout projection 192 mm
- fixed spout
- swivelling aerator M24x1
- manual tub/shower diverter
- hand shower with 3 jets: normal, soft, cascade, anticalcareous system and backflow preventer
- flow rate hand shower 8,6 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- cartridge with ceramic discs ½"
- concealed S-connections ½" x ¾"

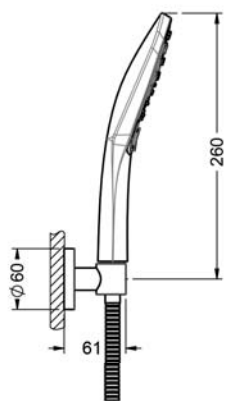





ELEVEN

633.20.505.xxx

Exposed tub/shower mixer, inclusive shower set 1/2"



- wall mounting
- spout projection 192 mm
- fixed spout
- aerator M24x1
- manual tub/shower diverter
- metal hand shower, anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- cartridge with ceramic discs 1/2"
- concealed S-connections 1/2" x 3/4"

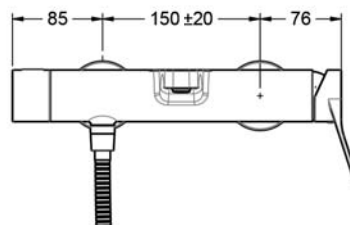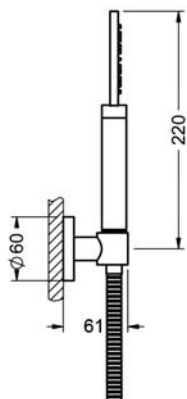



ELEVEN

633.20.510.xxx

Exposed tub/shower mixer, without shower set ½"



- wall mounting
- spout projection 192 mm
- aerator M24x1
- tub/shower diverter
- cartridge with ceramic discs ½"
- concealed S-connections ½" x ¾"

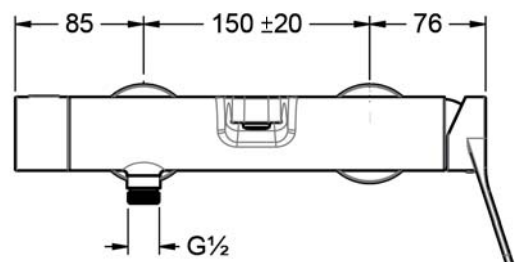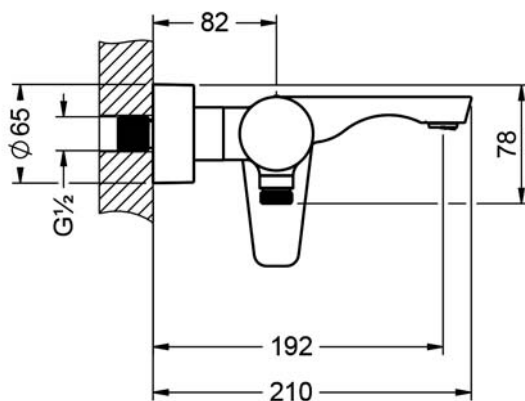

ELEVEN

633.20.540.xxx


Tub/shower mixer for supply pipes, inclusive shower set ½"



- free standing assembly
- spout projection with pipes 232 mm
- aerator M24 x 1
- flow rate of the spout 20 l/min at 3 bar
- tub/shower diverter
- hand shower with 3 jets, anticalcareous system and backflow preventer
- flow rate hand shower 8,6 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- cartridge with ceramic discs ½"
- total height 990 mm
- aerator height 805 mm

Required:

- **632.15.260.xxx** | 2x Water supply pipes ½"
- **109.10.970.000** | Assembly set for pre-installation



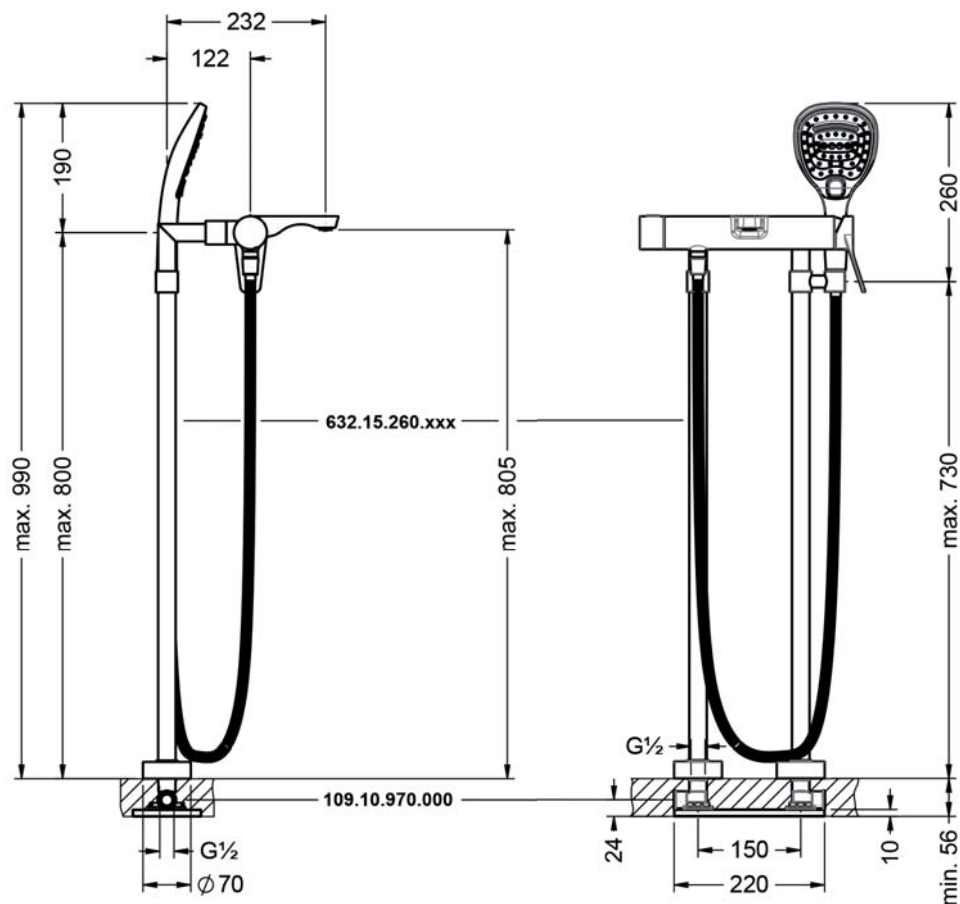


ELEVEN

109.10.970.000

Assembly set for pre-installation

- joint plate with fixing set for water supply pipes
XXX.15.260.xxx

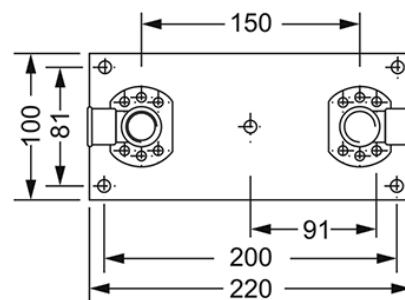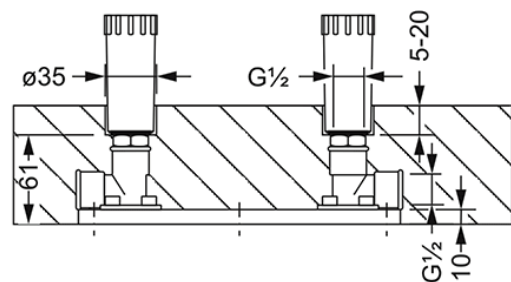



ELEVEN

633.20.600.xxx

Single lever exposed shower mixer 1/2"

- wall mounting
- cartridge with ceramic discs 1/2"
- discharge 1/2"
- concealed S-connections 1/2" x 3/4"


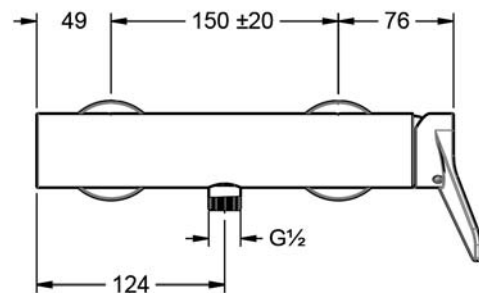
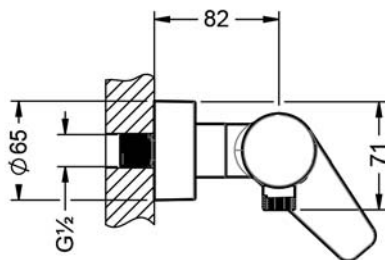


ELEVEN

632.20.250.xxx

Exposed shower thermostat 1/2"

- wall mounting
- cartridge with thermoelement
- heat scale and locking device at 38°C
- ceramic cartridge 1/2"

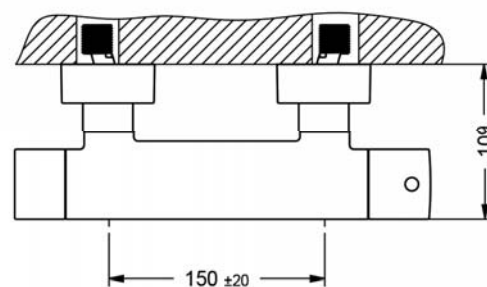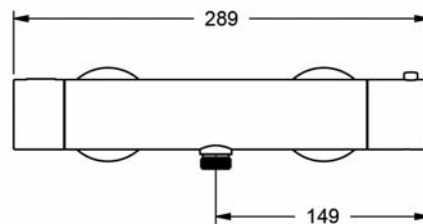

ELEVEN

633.20.660.xxx


Exposed set with shower system 1/2"



- rain shower head 1/2", Ø 250 mm
- full metal body with ball joint and anticalcareous system
- flow rate of the rain shower head 11 l/min at 3 bar
- supply pipe, diverter, wall bracket to connect the exposed shower mixer, spout projection 390-410 mm
- fitting for hand shower adjustable in height and inclination
- shower combination, hand shower with 3 jets: normal, soft, cascade, with anticalcareous system and backflow preventer
- flow rate hand shower 8,6 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- exposed shower mixer for supply pipe 1/2"
- single lever and diverter cartridge with ceramic discs 1/2"
- concealed S-connections 1/2" x 3/4"

Required:

- **649.13.885.xxx** | Rain shower head 1/2", Ø 250 mm
- **649.20.260.xxx** | Supply pipe, diverter, wall bracket
- **632.13.700.xxx** | Shower combination
- **633.20.610.xxx** | Exposed shower mixer for supply pipe 1/2"

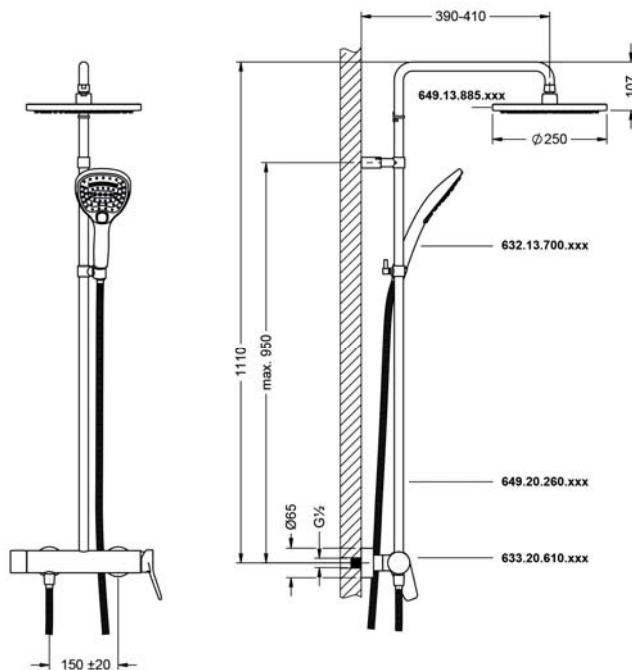

ELEVEN

633.20.665.xxx


Exposed set with shower system 1/2"



- rain shower head 1/2", Ø 250 mm
- full metal body with ball joint and anticalcareous system
- flow rate of the rain shower head 11 l/min at 3 bar
- supply pipe, diverter, wall bracket to connect the exposed shower mixer, spout projection 390-410 mm
- fitting for hand shower adjustable in height and inclination
- metal hand shower with 1 jet, anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- exposed shower mixer for supply pipe 1/2"
- single lever and diverter cartridge with ceramic discs 1/2"
- concealed S-connections 1/2" x 3/4"

Required:

- **649.13.885.xxx** | Rain shower head 1/2", Ø 250 mm
- **649.20.260.xxx** | Supply pipe, diverter, wall bracket
- **632.13.705.xxx** | Shower combination
- **633.20.610.xxx** | Exposed shower mixer for supply pipe 1/2"

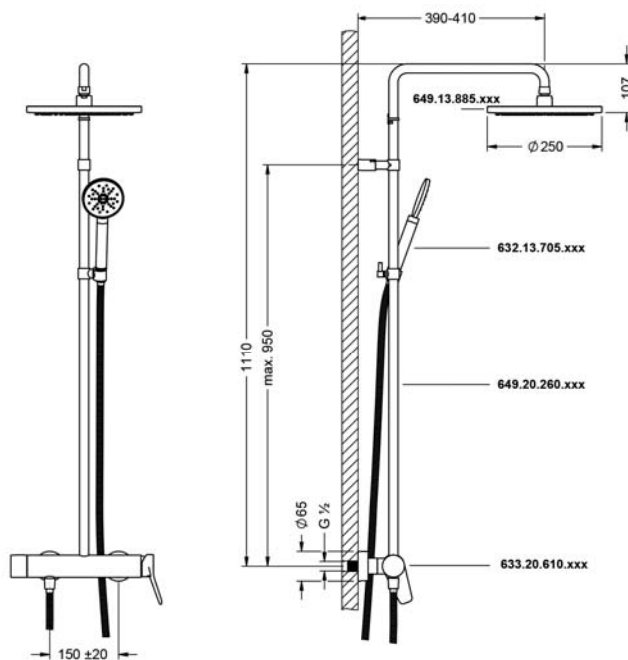

ELEVEN

632.20.460.xxx


Exposed thermostat-set with shower system 1/2"



- rain shower head 1/2", ø 250 mm
- full metal body with ball joint and anticalcareous system
- flow rate of the rain shower head 11 l/min at 3 bar
- supply pipe, diverter, wall bracket to connect the exposed shower mixer projection 390 - 410 mm
- shower combination
- hand shower with 3 jets, anticalcareous system and backflow preventer
- metal shower hose 1500 mm, both sides with turning cone
- flow rate hand shower 8,6 l/min at 3 bar
- exposed shower thermostat for supply pipe 1/2"
- cartridge with thermoelement
- locking device at 38 °C
- ceramic cartridge 1/2"
- discharge 3/4"
- concealed S-connections 1/2" x 3/4"

Consisting of:

- **649.13.885.xxx** | Rain shower head 1/2", ø 250 mm
- **649.20.260.xxx** | Supply pipe, diverter, wall bracket
- **632.13.700.xxx** | Shower combination
- **632.20.260.xxx** | Exposed shower thermostat 1/2"

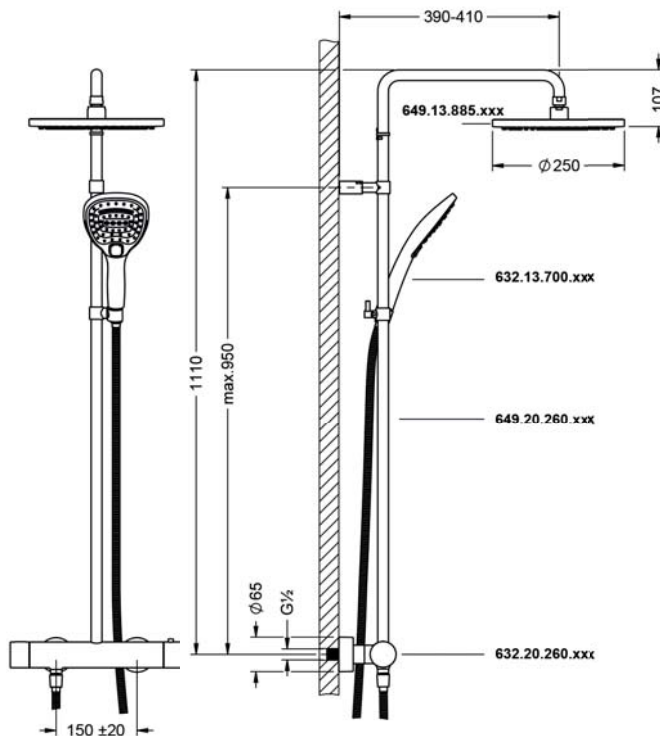

ELEVEN

632.20.465.xxx


Exposed thermostat-set with shower system 1/2"



- rain shower head 1/2", Ø 250 mm
- full metal body with ball joint and anticalcareous system
- flow rate of the rain shower head 11 l/min at 3 bar
- supply pipe, diverter, wall bracket to connect the exposed shower mixer projection 390-410 mm
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- exposed shower thermostat for supply pipe 1/2"
- cartridge with thermoelement
- locking device at 38 °C
- diverter cartridge with ceramic discs 1/2"
- discharge 1/2"
- concealed S-connections 1/2" x 3/4"

Consisting of:

- **649.13.885.xxx** | Rain shower head 1/2", Ø 250 mm
- **649.20.260.xxx** | Supply pipe, diverter, wall bracket
- **632.13.705.xxx** | Shower combination
- **632.20.260.xxx** | Exposed shower thermostat 1/2"

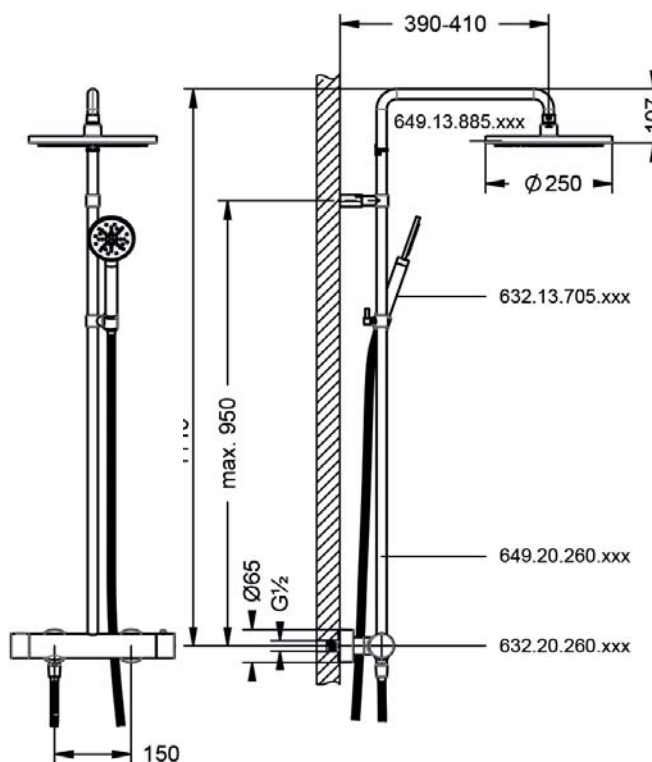

ELEVEN

633.20.125.xxx




Concealed single lever wall tub and shower mixer, assembly set ½"



- manual two way diverter with ceramic cartridge for pressure-independent function
- with safety device
- flow rate 21 l/min at 3 bar

Required:

- **649.40.360.000** | Concealed wall box ½"

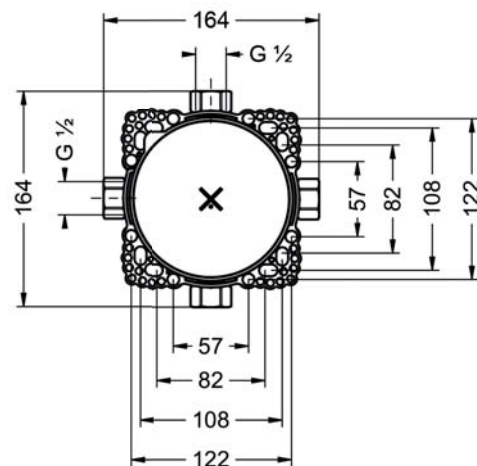

ELEVEN

633.20.135.xxx




Concealed single lever wall tub and shower mixer, assembly set ½"



- manual two way diverter with ceramic cartridge for pressure-independent function
- without safety device
- flow rate 21 l/min at 3 bar

Required:

- **649.40.360.000** | Concealed wall box ½"

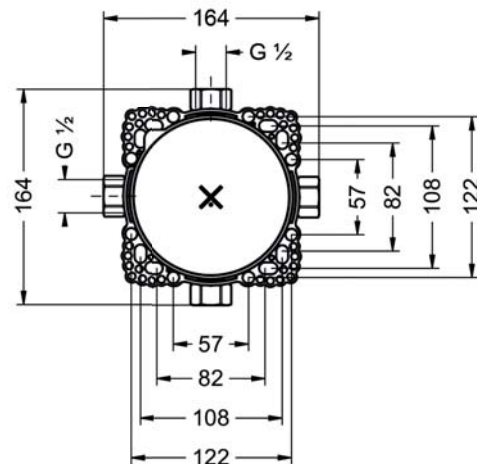

ELEVEN

633.20.245.xxx




Concealed single lever shower mixer, assembly set ½"



- without diverter
- functional unit with ceramic discs
- flow rate 20,4 l/min at 3 bar

Required:

- **649.40.360.000** | Concealed wall box ½"

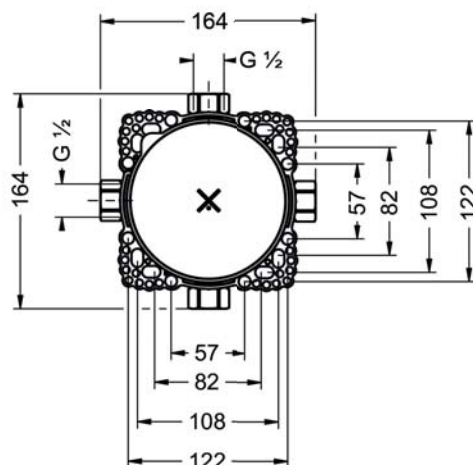

ELEVEN

632.40.380.xxx




Concealed wall thermostat with flow control, assembly set ½"



- manual two way diverter with ceramic cartridge for pressure-independent function
- with integrated volume control
- with safety device
- flow rate 20,4 l/min at 3 bar

Required:

- **649.40.360.000** | Concealed wall box ½"

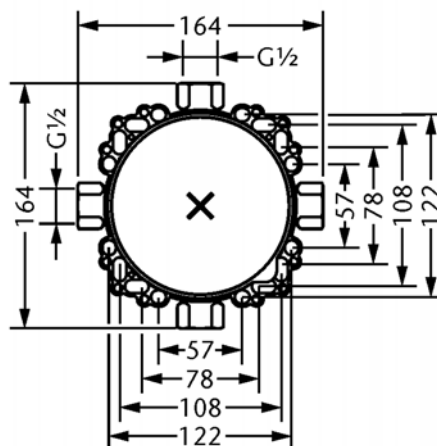

ELEVEN

632.40.360.xxx




Concealed wall thermostat with flow control, assembly set ½"



- without diverter
- with integrated ceramic cartridge for volume control
- flow rate 20,4 l/min at 3 bar

Required:

- **649.40.360.000** | Concealed wall box ½"

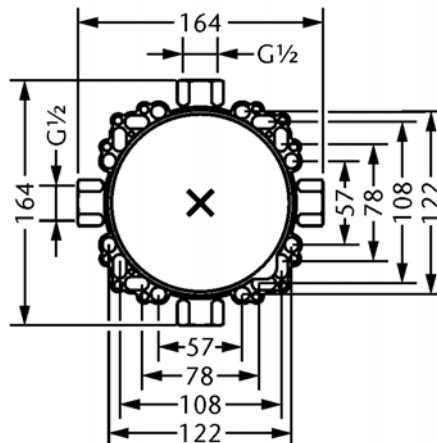

ELEVEN

615.40.460.xxx




Concealed wall thermostat without flow control, assembly set 1/2"



- without flow control
- without diverter
- without shut-off
- flow rate 28,5 l/min at 3 bar

Required:

- **649.40.360.000** | Concealed wall box 1/2"

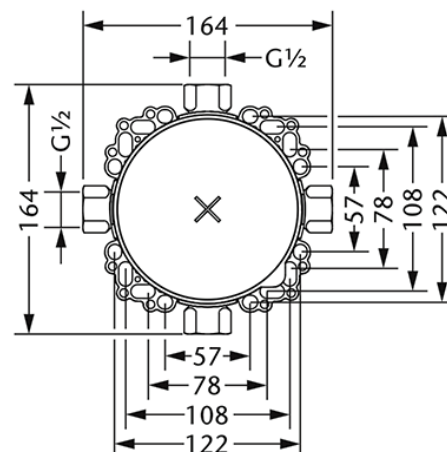





ELEVEN

649.40.360.000

Concealed wall box ½"

- for installing concealed wall thermostats ½"
- for wetwall and drywall construction

To order a complete unit, please order the concealed wall box with an assembly set

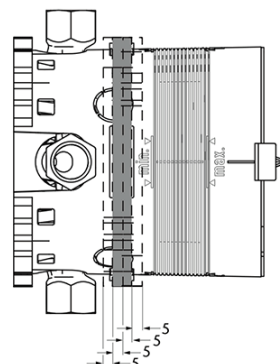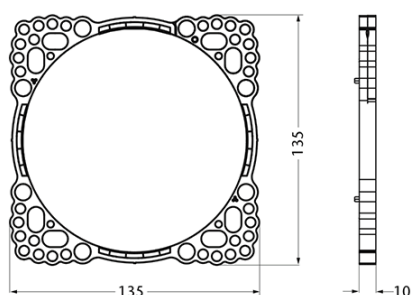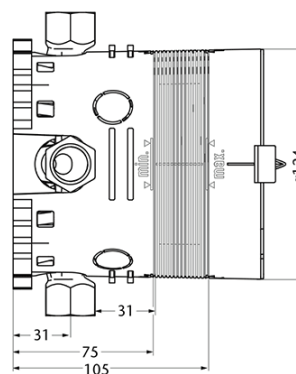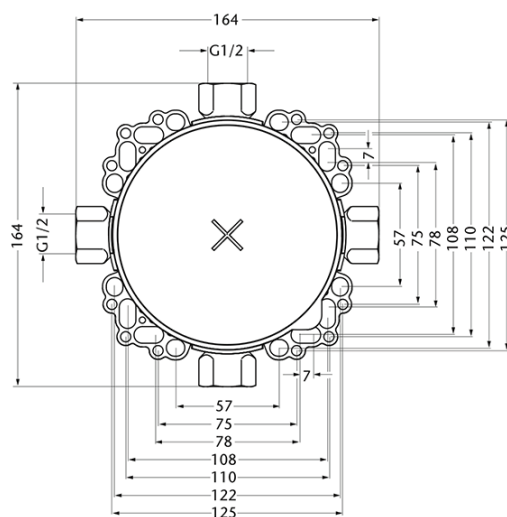


ELEVEN

649.20.612.000

Connection adapter 1/2"



- connection adapter, end plug
- for connection 649.20.610.000, 649.20.620.000, 649.20.630.000
matching for wall box 649.40.360.000

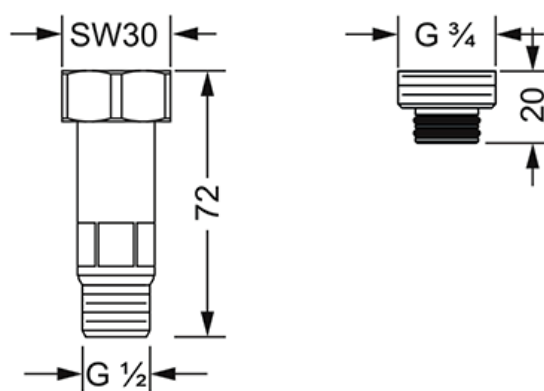

ELEVEN

615.40.555.xxx


Concealed wall thermostat without flow control, assembly set $\frac{3}{4}$ "



- without diverter
- design handle with safety lock at 38°C
- flow rate 64,2 l/min at 3 bar

Required:

- **649.40.555.000** | Concealed thermostat body $\frac{3}{4}$ "

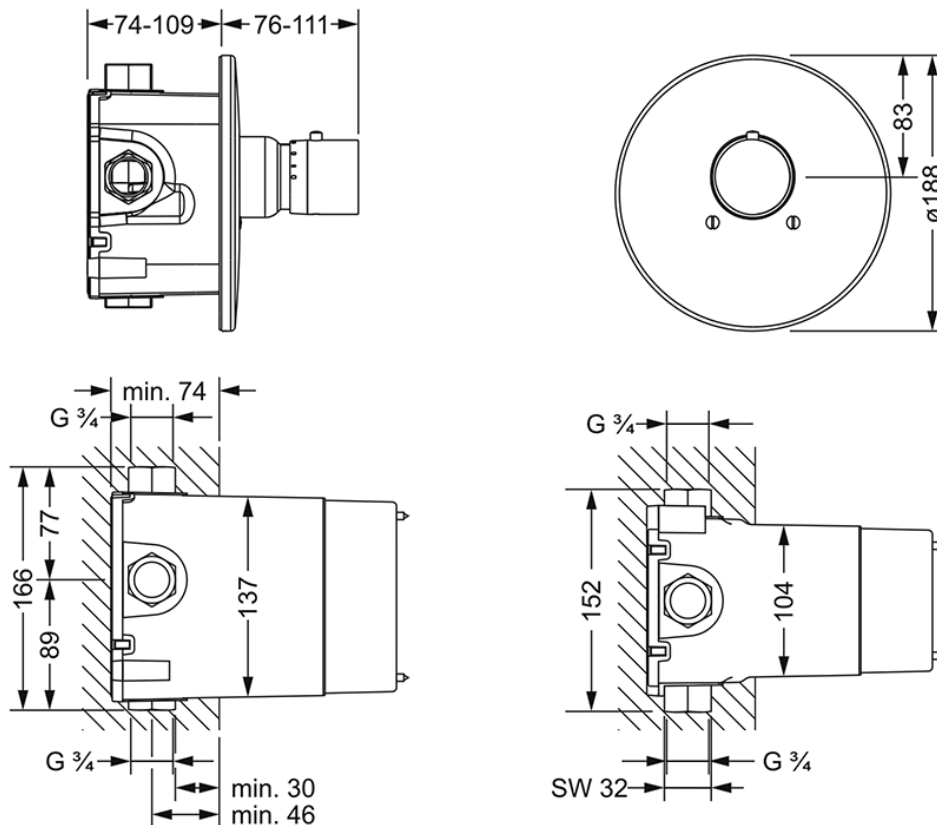



ELEVEN

649.40.555.000

Concealed thermostat body $\frac{3}{4}$ "



- for assembly set XXX.40.555.xxx
- cartridge with filter screens
- for wetwall and drywall construction
- without shut-off
- flow rate 64,2 l/min at 3 bar

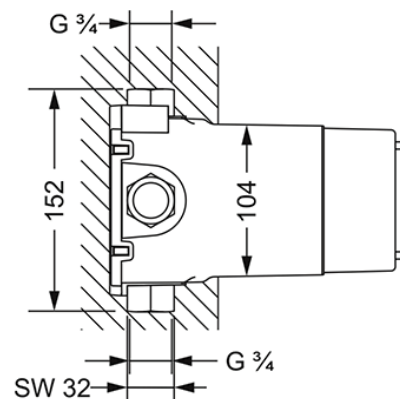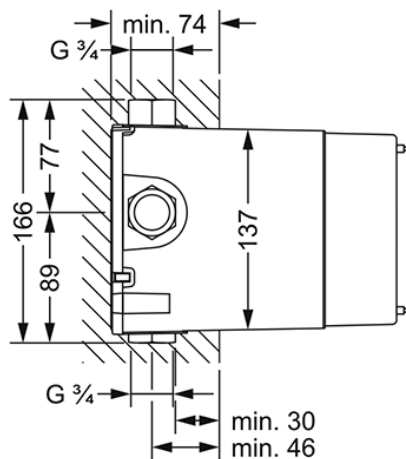


ELEVEN

649.20.634.000

Connection adapter $\frac{3}{4}$ "



- connection adapter, end plug
- for connection 649.20.610.000, 649.20.620.000, 649.20.630.000 with thermostat body 649.40.555.000

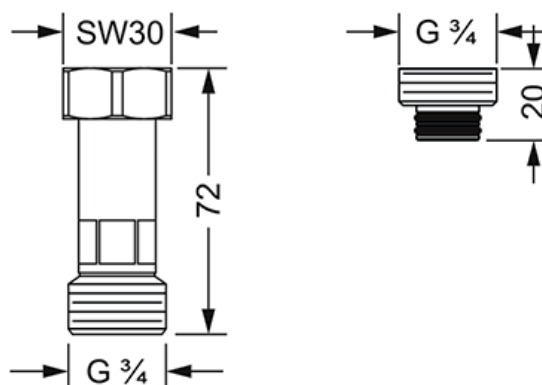

ELEVEN

615.40.520.xxx


Concealed wall thermostat without flow control, assembly set $\frac{3}{4}$ "



- without diverter
- design handle for temperature control
- locking device at 38°C
- flow rate 41 l/min at 3 bar

Required:

- **649.40.520.000** | Concealed thermostat body $\frac{3}{4}$ "

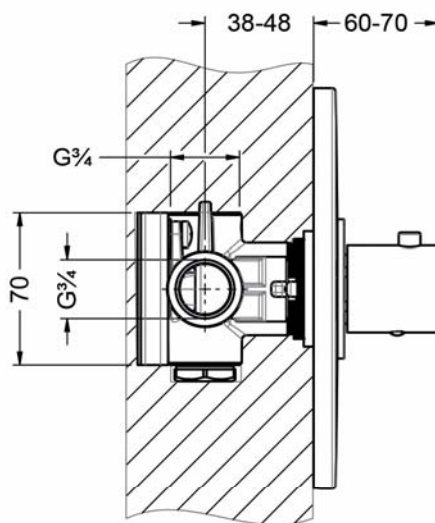



ELEVEN

649.40.520.000

Concealed thermostat body $\frac{3}{4}$ "



- for assembly set XXX.40.520.xxx
- flow rate 41 l/min at 3 bar
- cartridge with filter screens
- for wetwall and drywall construction
- without shut-off
- fast thermal element shut-down in case of cold water loss, fast response time to reduce hot and cold spikes
- complete with mud guard for installation

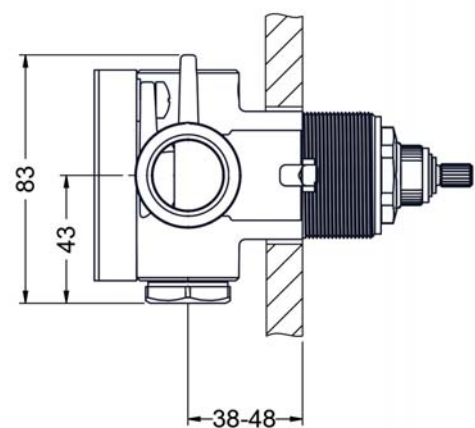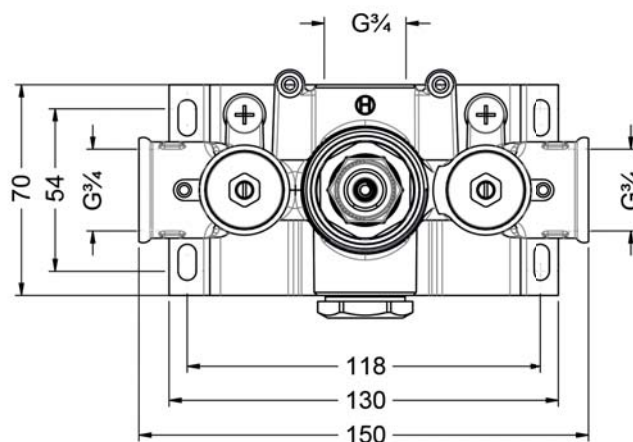

ELEVEN

632.60.432.xxx


Concealed wall-valve-modul assembly set



- design handle
- socket with adjustable
- escutcheon
- flow rate for $\frac{1}{2}$ " 17 l/min at 3 bar
- flow rate for $\frac{3}{4}$ " 21 l/min at 3 bar

Required:

- **649.20.610.000** | Concealed wall-valve-modul, single
- **649.20.620.000** | Concealed wall-valve-modul, double
- **649.20.630.000** | Concealed wall-valve-modul, triple

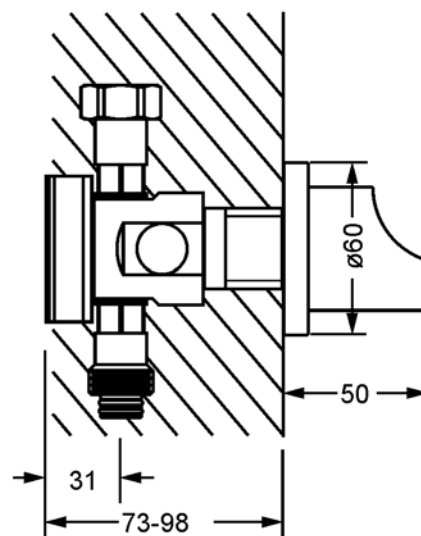

ELEVEN

649.20.610.000


Concealed wall-valve-modul, single



- 2 outlets $\frac{1}{2}$ " each 1x right/left possible, simultaneously usable
- the module can be used as a water outlet in the installation and can be extended by the desired number of valves
- the module is supplied with brackets for wall mounting
- flow rate with $\frac{1}{2}$ " thermostat average 27,6 l/min at 3 bar
- flow rate with $\frac{3}{4}$ " thermostat average 39,2 l/min at 3 bar

For the connection to the concealed part of the thermostat is required:

- **649.20.612.000** | adapter $\frac{1}{2}$ " or
- **649.20.634.000** | adapter $\frac{3}{4}$ "

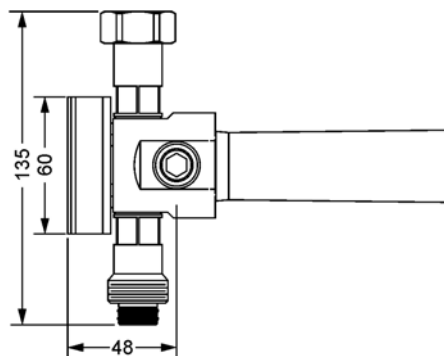

ELEVEN

649.20.620.000


Concealed wall-valve-modul, double



- 4 outlets $\frac{1}{2}$ " , each 2x right/left possible, simultaneously usable
- precise assembly due to composite
- the module can be used as a water outlet in the installation and can be extended by the desired number of valves
- the module is supplied with brackets for wall mounting
- flow rate with $\frac{1}{2}$ " thermostat average 32,6 l/min at 3 bar
- flow rate with $\frac{3}{4}$ " thermostat average 52,7 l/min at 3 bar

For the connection to the concealed part of the thermostat is required:

- **649.20.612.000** | adapter $\frac{1}{2}$ " or
- **649.20.634.000** | adapter $\frac{3}{4}$ "

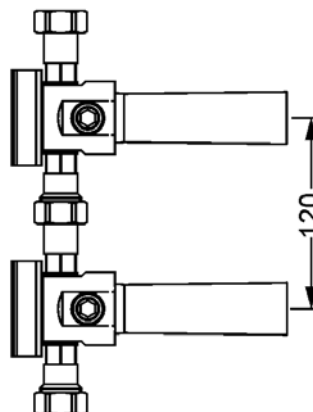

ELEVEN

649.20.630.000


Concealed wall-valve-modul, triple



- 6 outlets $\frac{1}{2}$ ", each 3x right/left possible, simultaneously usable
- precise assembly due to composite
- the module can be used as a water outlet in the installation and can be extended by the desired number of valves
- the module is supplied with brackets for wall mounting
- flow rate with $\frac{1}{2}$ " thermostat average 33 l/min at 3 bar
- flow rate with $\frac{3}{4}$ " thermostat average 55,5 l/min at 3 bar

For the connection to the concealed part of the thermostat is required:

- 649.20.612.000 | adapter $\frac{1}{2}$ " or
- 649.20.634.000 | adapter $\frac{3}{4}$ "

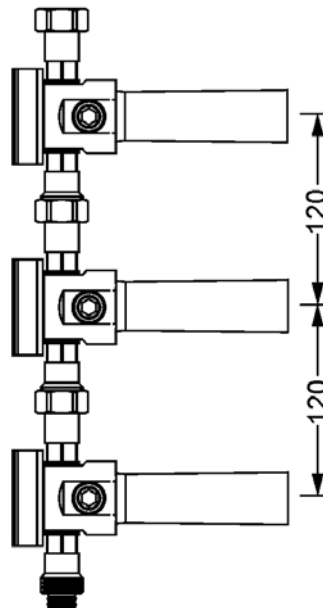

ELEVEN

632.50.234.xxx


Concealed wall valve, assembly set




- design handle
- socket with adjustable
- escutcheon
- flow rate for 1/2" 17 l/min at 3 bar
- flow rate for 3/4" 21 l/min at 3 bar

Required:

- **649.20.350.000** | Concealed wall valve 1/2", body, clockwise closure
- **649.20.355.000** | Concealed wall valve 1/2", body, counter-clockwise closure
- **649.20.450.000** | Concealed wall valve 3/4", body, clockwise closure
- **649.20.455.000** | Concealed wall valve 3/4", body, counter-clockwise closure

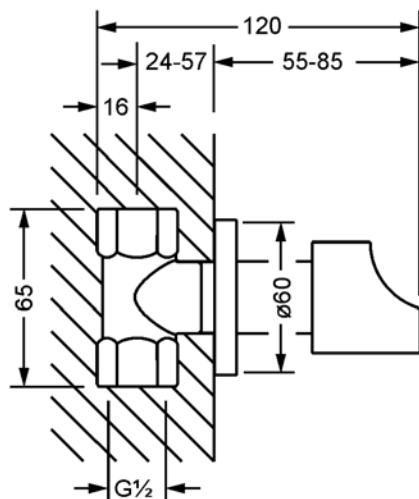

mit Einbaukörper / with concealed body 1/2"

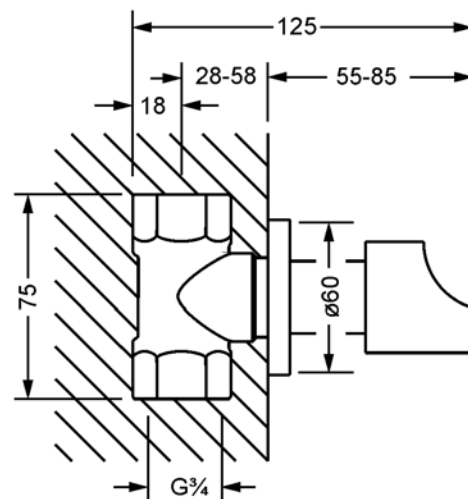


mit Einbaukörper / with concealed body 3/4"

ELEVEN

649.20.350.000

Concealed wall valve 1/2", body

- clockwise closure
- ceramic discs 1/2"
- flow rate 17 l/min at 3 bar

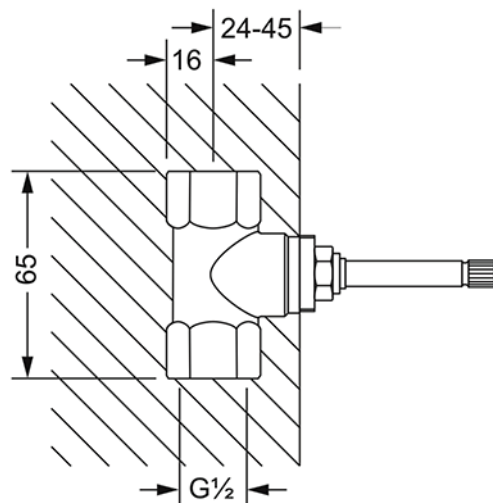


Einbaukörper 1/2"

ELEVEN

649.20.355.000

Concealed wall valve 1/2", body

- counter-clockwise closure
- ceramic discs 1/2"
- flow rate 17 l/min at 3 bar

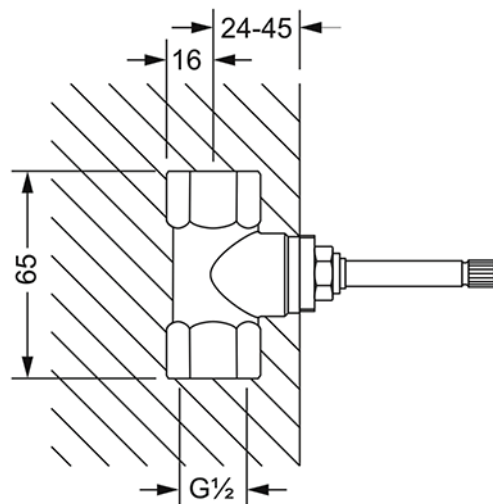


Einbaukörper 1/2"

ELEVEN

649.20.450.000

Concealed wall valve $\frac{3}{4}$ ", body

- clockwise closure
- ceramic discs $\frac{1}{2}$ "
- flow rate 21 l/min at 3 bar

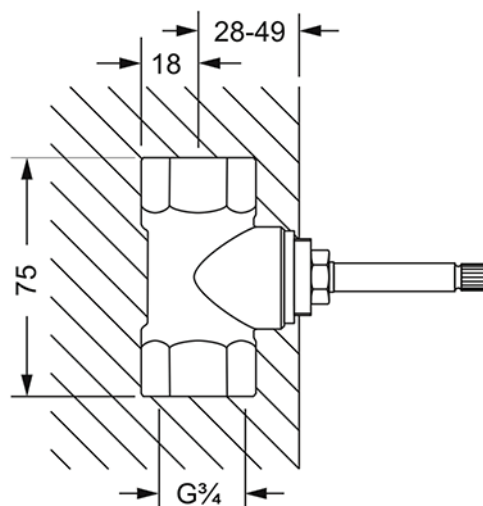


Einbaukörper $\frac{3}{4}$ "

ELEVEN

649.20.455.000

Concealed wall valve $\frac{3}{4}$ ", body

- counter-clockwise closure
- ceramic discs $\frac{1}{2}$ "
- flow rate 21 l/min at 3 bar

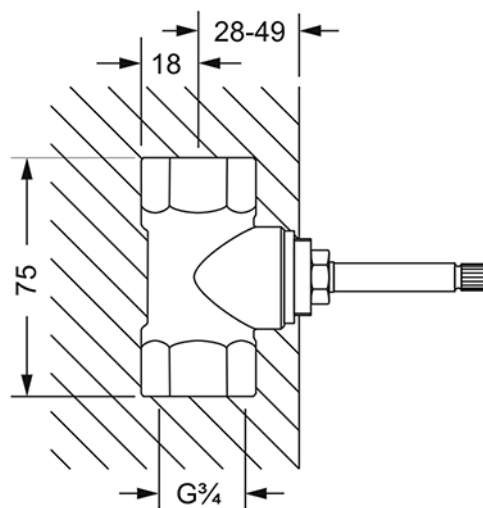

Einbaukörper $\frac{3}{4}$ "

ELEVEN

632.40.650.xxx


Concealed 3-position diverter assembly set 1/2"



- design handle
- socket with adjustable escutcheon
- flow rate 52 l/min at 3 bar

Required:

- **649.40.600.000** | Concealed 3-position diverter 1/2", diverter body


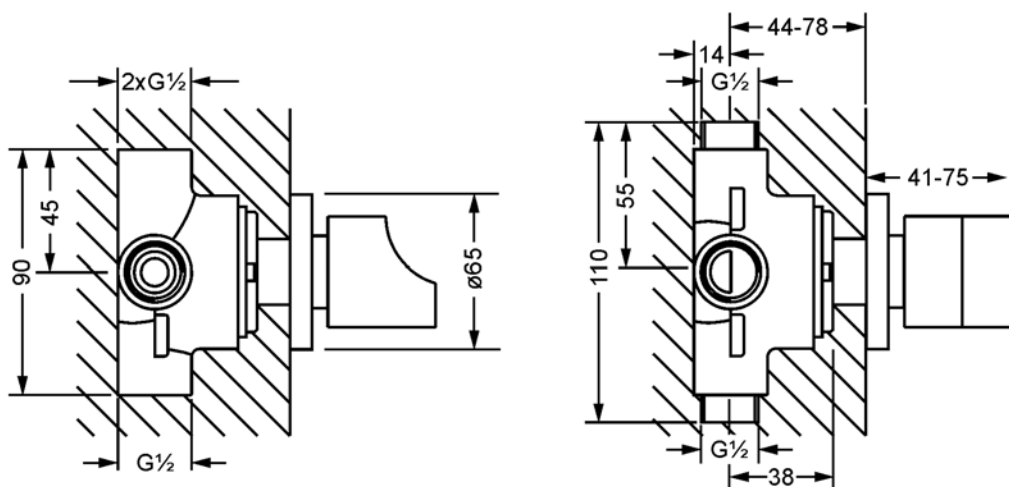


ELEVEN

649.40.600.000

Concealed 3-position diverter ½" diverter body

- for assembly set XXX.40.650.xxx
- flow rate 52 l/min at 3 bar

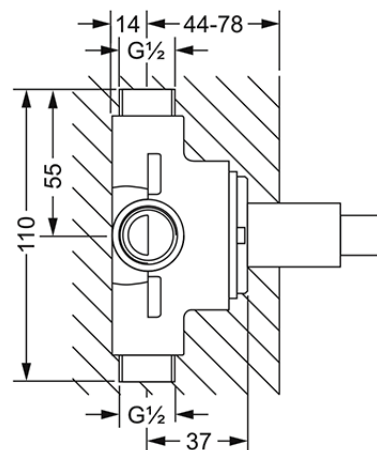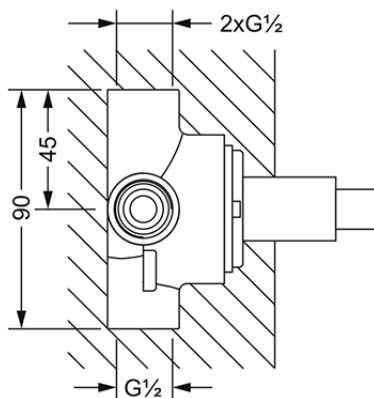



ELEVEN

632.13.300.xxx

Shower bar set, complete



- wall mounting
- wall bar 800 mm, with slider
- hand shower with 3 jets, anticalcareous system and backflow preventer
- flow rate hand shower 8,6 l/min at 3 bar
- metal shower hose 1750 mm, both sides with turning cone

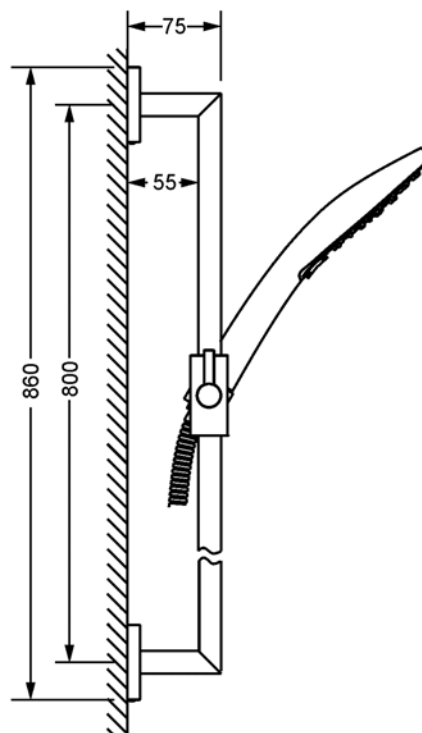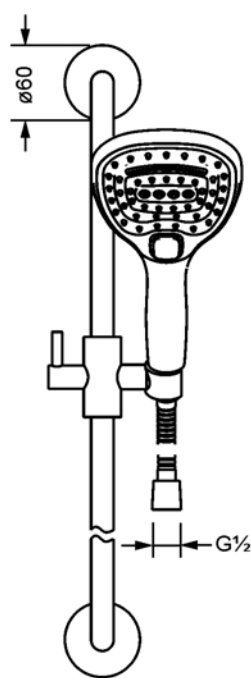


ELEVEN

632.13.305.xxx

Shower bar set, complete



- wall mounting
- wall bar 800 mm, with slider
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1750 mm, both sides with turning cone

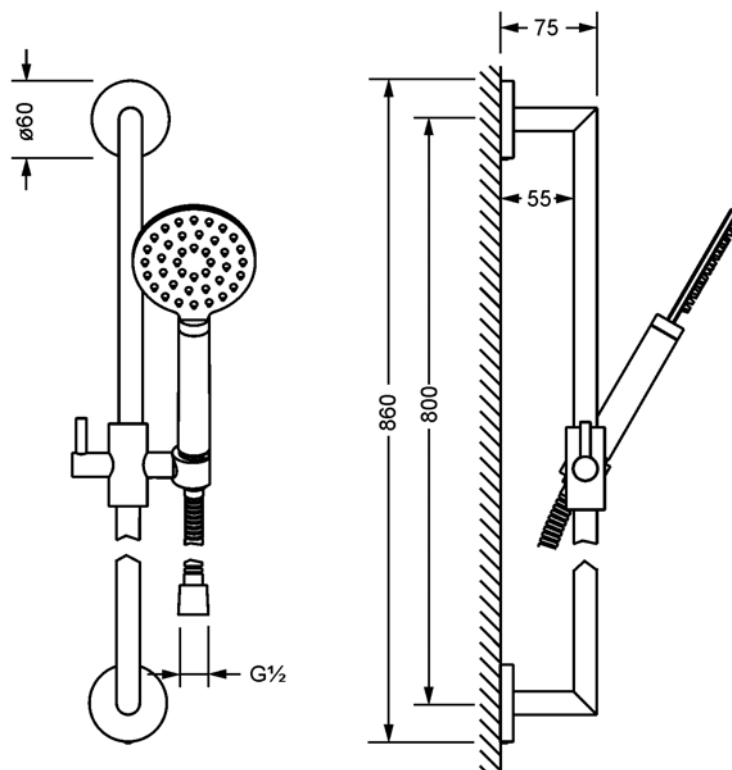


ELEVEN

632.13.210.xxx

Shower combination 1/2"



- wall fitting and elbow connection 1/2"
- hand shower with 3 jets: normal, soft, cascade with anticalcareous system and backflow preventer
- flow rate hand shower 8,6 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone

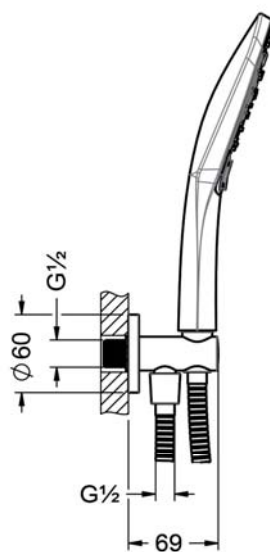



ELEVEN

632.13.215.xxx

Shower combination 1/2"



- wall fitting and elbow connection 1/2"
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone

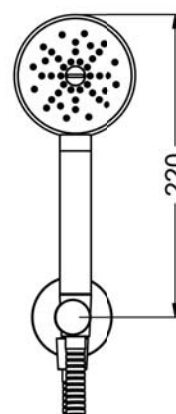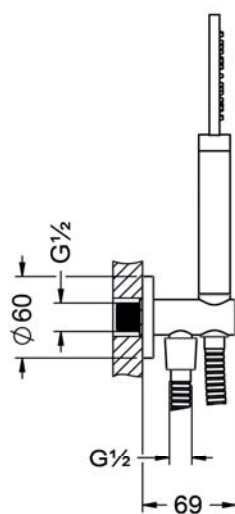


ELEVEN

632.13.150.xxx

Wall elbow connection without cradle 1/2"

- wall mounting
- discharge 1/2"
- with backflow preventer
- escutcheon


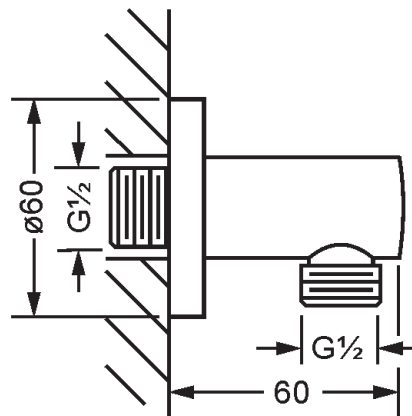


ELEVEN

632.13.270.xxx

Wall fitting for hand shower

- wall mounting
- escutcheon $\varnothing 60$





ELEVEN

619.13.237.xxx

Ablution spray combination 1/2"



- wall fitting and elbow connection 1/2"
- spray hand shower 649.13.337.xxx, completely metal
- one jet, push-lever operation
- flexible metal shower hose 1250 mm
- flow rate with water limitation 6,9 l/min

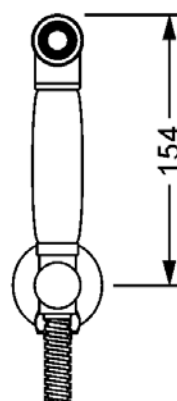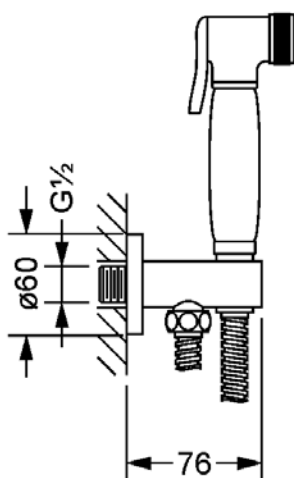

ELEVEN

633.20.237.xxx


Concealed single lever for ablution spray, assembly set ½"



- design handle
- escutcheon
- flow rate 26 l/min at 3 bar

Required:

- **649.20.237.000** | Single lever mixer ½", concealed body


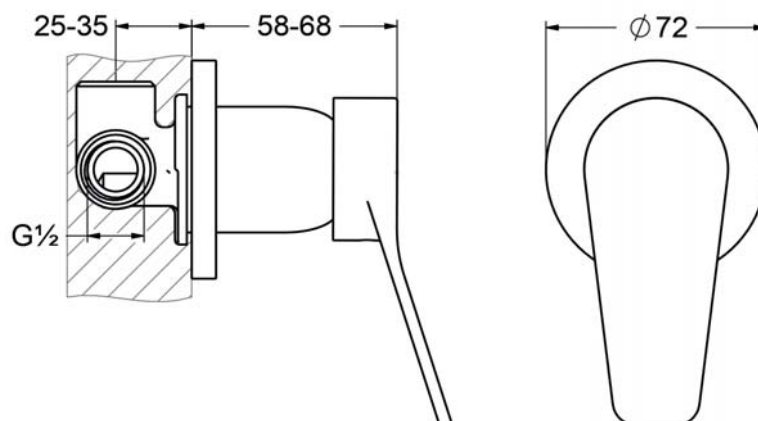


ELEVEN

649.20.237.000

Single lever mixer 1/2", concealed body

- cartridge with ceramic discs 1/2"
- for assembly set XXX.20.237.xxx
- flow rate 26 l/min at 3 bar

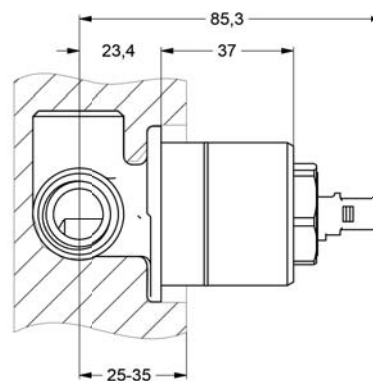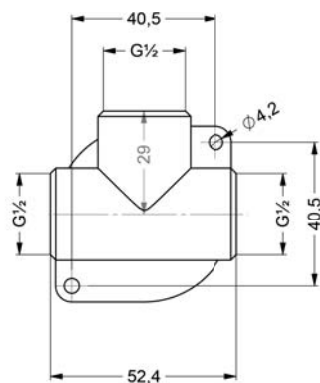

ELEVEN


649.13.885.xxx

Rain shower head ½", Ø 250 mm



- material metal
- with ball joint
- with anticalcareous system
- flow rate 11 l/min at 3 bar
- without wall bracket

Please order wall or ceiling bracket with the rain shower head separately

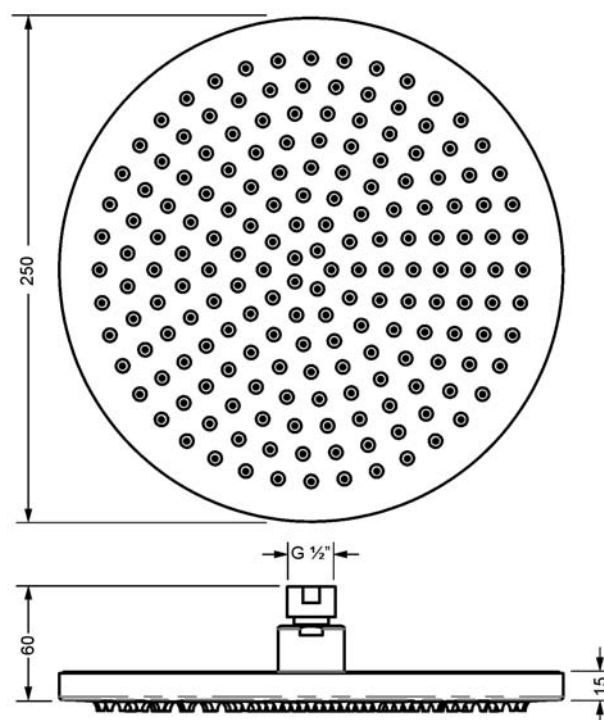


ELEVEN

649.13.755.xxx

Wall bracket 1/2"

- wall mounting
- spout projection 350 mm

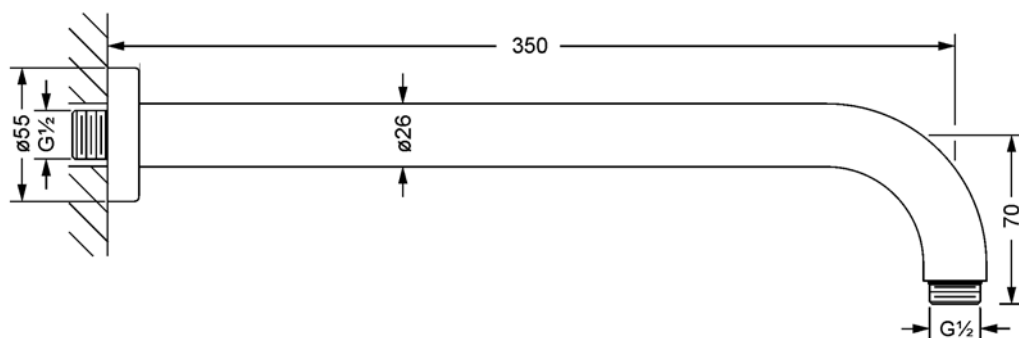


ELEVEN

649.13.519.xxx

Body spray side shower ½"



- wall mounting
- escutcheon ø 130 mm
- material: plastic
- swivel shower head, 20°
- anticalcareous system
- flow rate 3,6 l/min at 3 bar

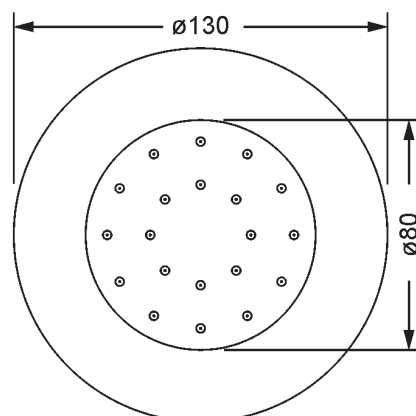


ELEVEN

649.13.381.xxx

Hand shower 1/2"



- material plastic
- anticalcareous system
- connection 1/2"
- with 3 jets: normal, soft, cascade
- flow rate 8,6 l/min at 3 bar

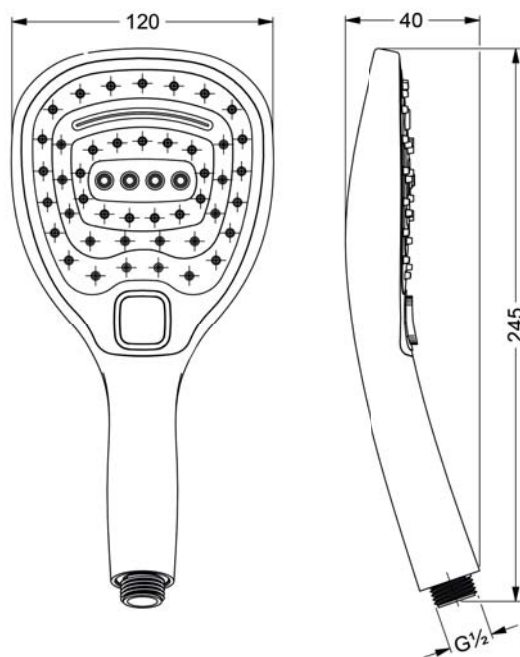



ELEVEN

649.13.391.xxx

Hand shower 1/2"



- material metal
- anticalcareous system
- connection 1/2"
- 1-spray hand shower
- flow rate 13,2 l/min at 3 bar


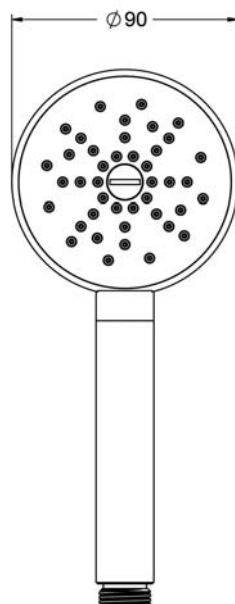


ELEVEN

632.00.002.xxx

Double towel bar

- wall model
- swivelling bars
- double
- approx. 400 mm


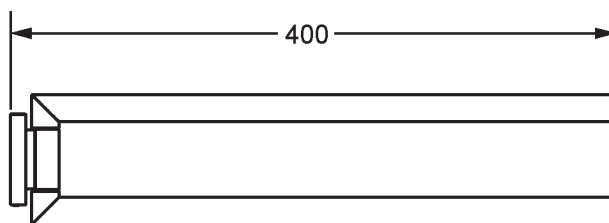


ELEVEN

632.00.004.xxx

Towel bar

- wall model
- rigid bar
- approx. 410 mm

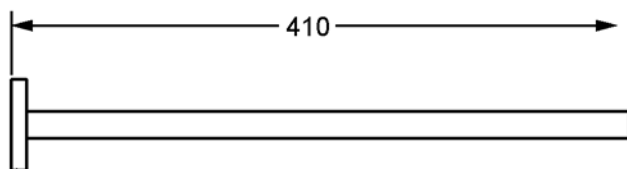


ELEVEN

632.00.047.xxx

Towel ring

- wall model
- open version


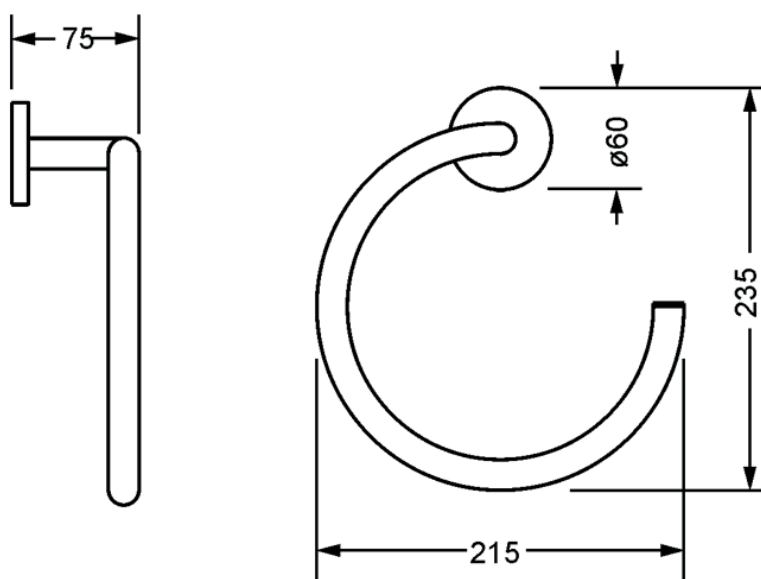


ELEVEN

632.00.022.xxx

Robe hanger

- wall model
- single




ELEVEN

632.00.040.xxx

Bath towel bar

- wall model
- approx. 800 mm

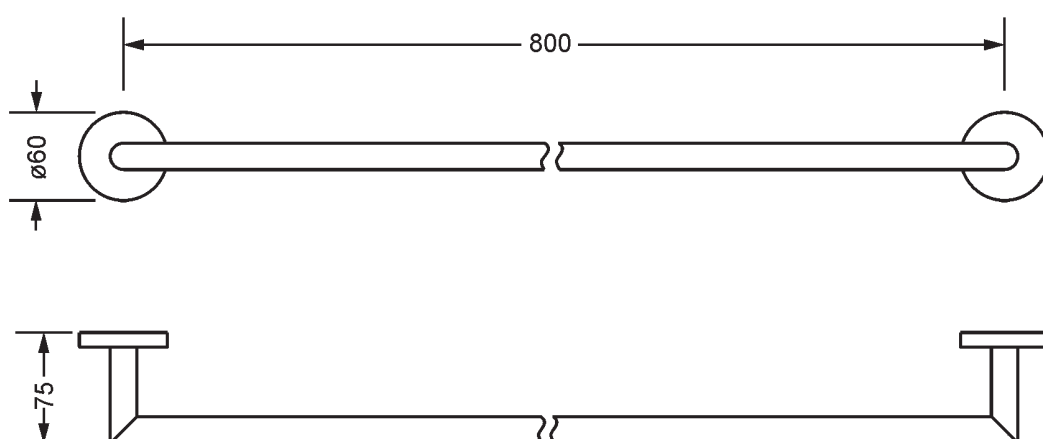


ELEVEN

632.00.041.xxx

Bath towel bar, double

- wall model
- approx. 600 mm



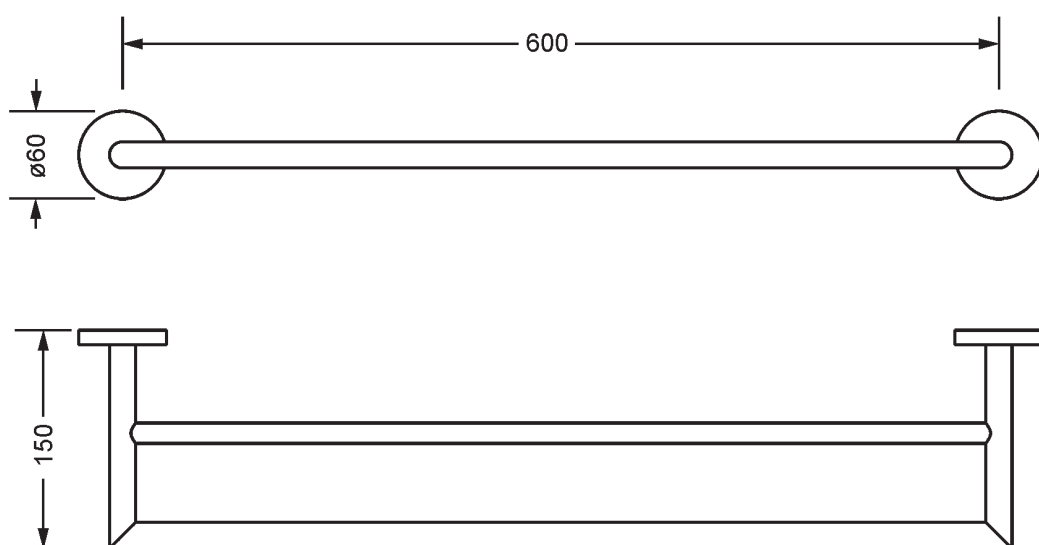


ELEVEN

632.00.048.xxx

Bath towel shelf

- wall model
- approx. 600 x 260 mm

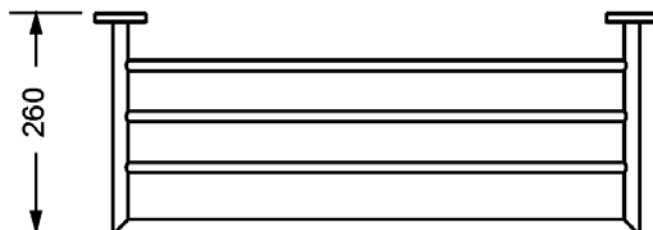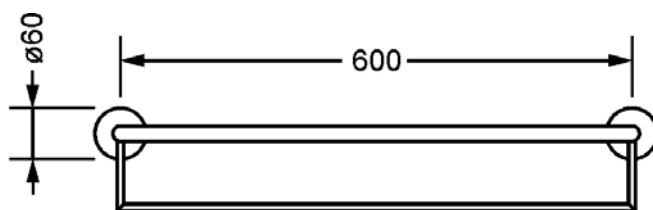


ELEVEN

632.00.031.xxx

Tub handle

- wall model
- approx. 300 mm


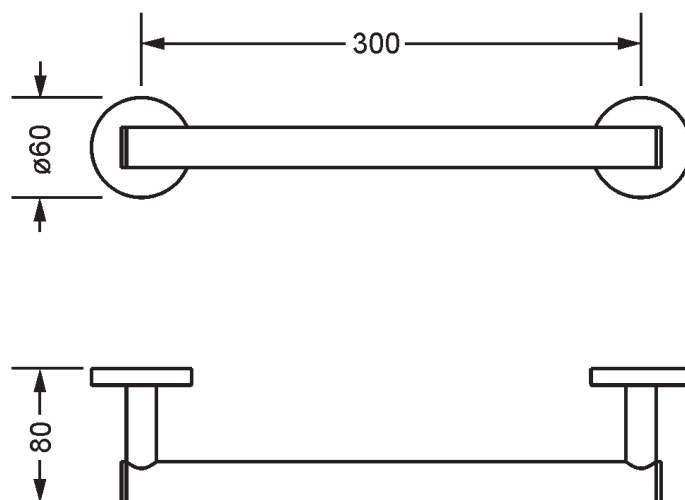


ELEVEN

634.00.104.xxx

Guest towel basket, angular

- wall model
- upper basket for clean towels
- bottom basket for used towels
- basket size 260 x 150 x 190 mm

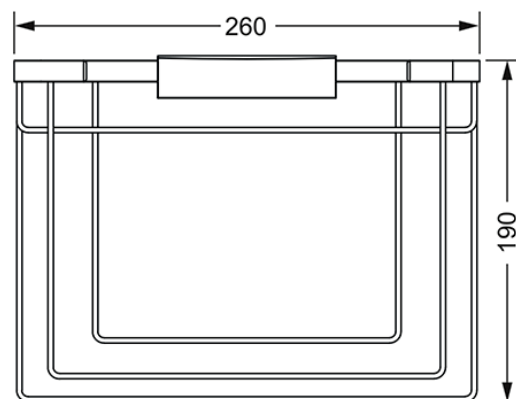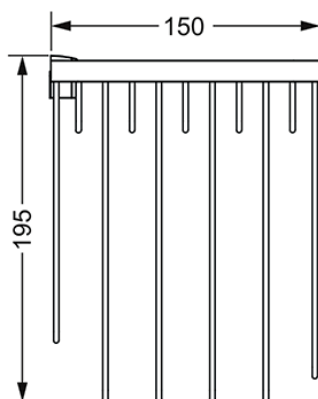


ELEVEN

632.00.007.xxx

Soap dish holder, complete

- wall model
- crystal glass dish, frosted

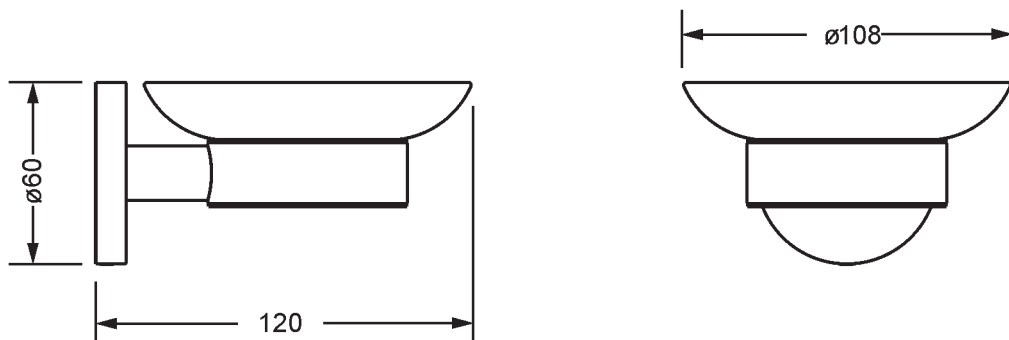


ELEVEN

632.00.017.xxx

Soap dish holder, complete

- free standing model
- crystal glass dish, frosted

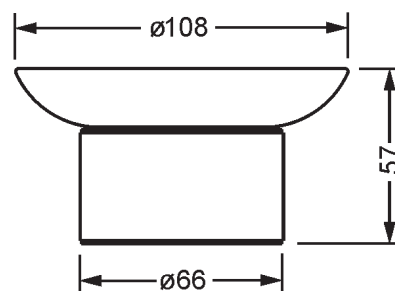


ELEVEN

632.00.005.xxx

Soap dispenser, complete



- wall model
- crystal glass hood, frosted
- easy filling from above
- actuation from below
- dosage: 0.5 ml /stroke
- filling volume 150 ml

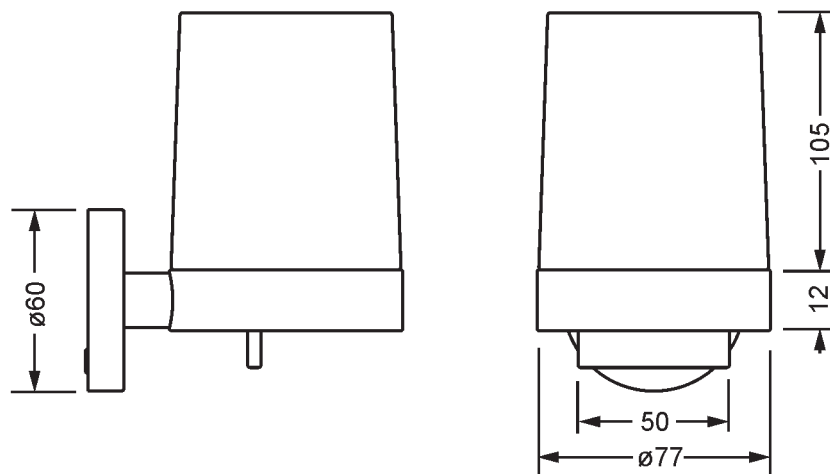


ELEVEN

632.00.016.xxx

Soap dispenser, complete

- free standing model
- metal



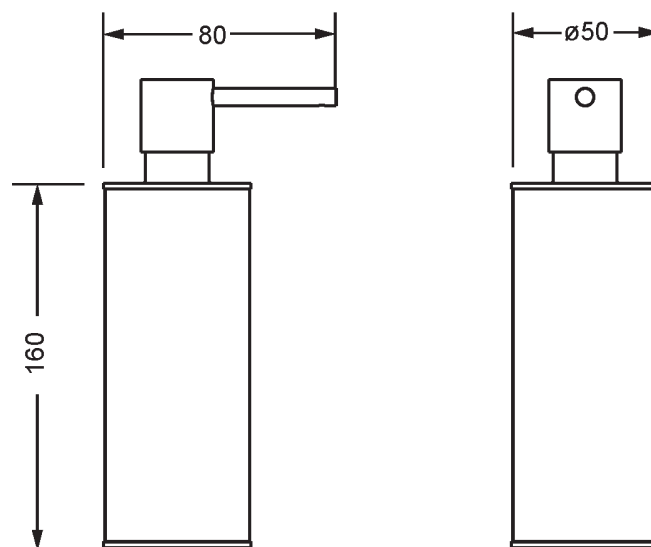


ELEVEN

634.00.105.xxx

Sponge basket

- wall model
- rectangular
- 260 x 130 mm

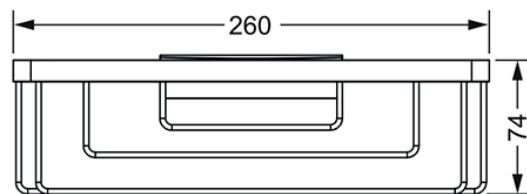

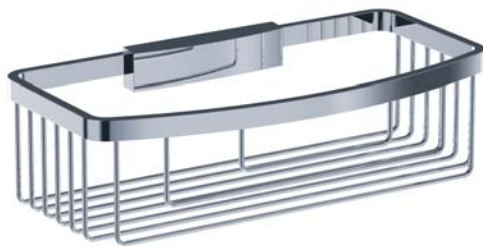


ELEVEN

634.00.106.xxx

Corner sponge basket

- wall model
- triangular
- 195 x 195 mm

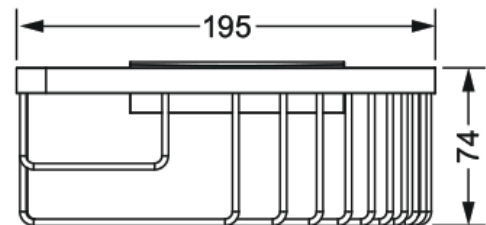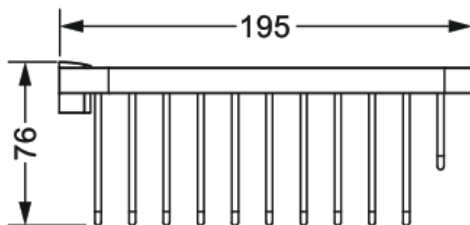


ELEVEN

632.00.036.xxx

Tumbler holder, complete

- wall model
- crystal glass tumbler, frosted

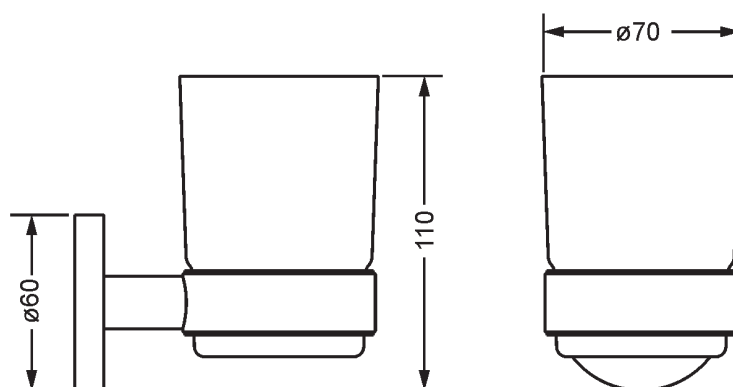


ELEVEN

632.00.046.xxx

Tumbler holder, complete

- free standing model
- crystal glass tumbler, frosted


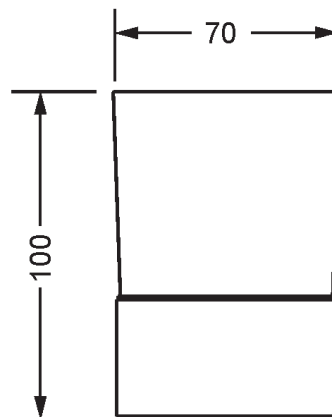


ELEVEN

632.00.014.xxx

Toilet paper roll holder

- wall model
- with lid

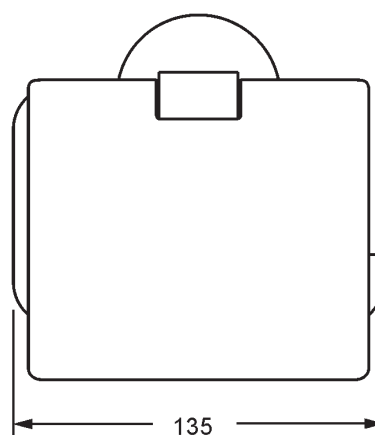
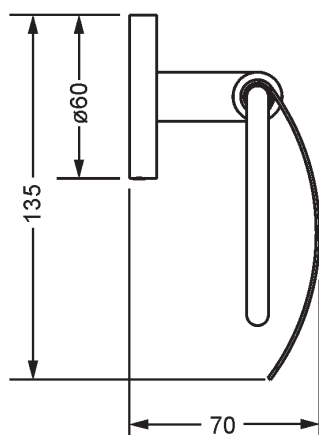


ELEVEN

632.00.024.xxx

Toilet paper roll holder

- wall model
- with shelf





ELEVEN

632.00.015.xxx

Spare toilet paper roll holder

- wall model
- for a spare roll of paper

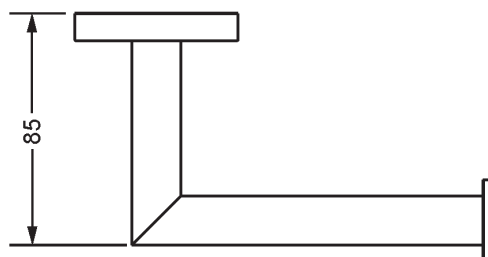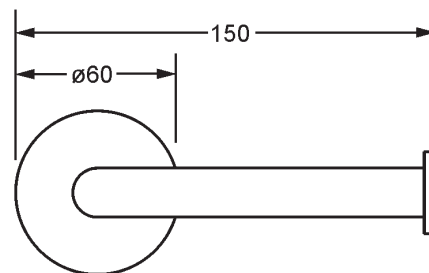


ELEVEN

632.00.000.xxx

Toilet brush holder set, complete



- wall model
- crystal glass, frosted

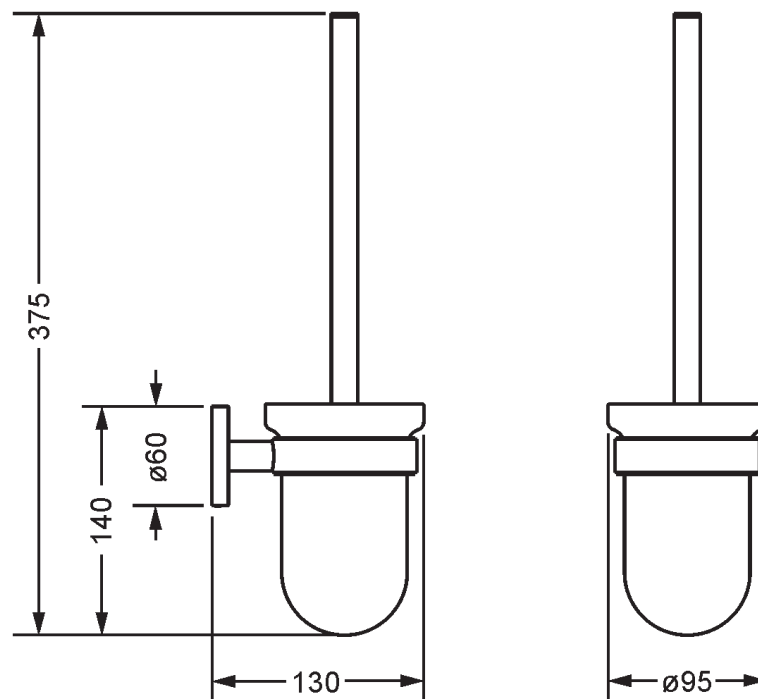


ELEVEN

632.00.001.xxx

Toilet brush holder set, complete



- free standing model
- constructed of solid brass

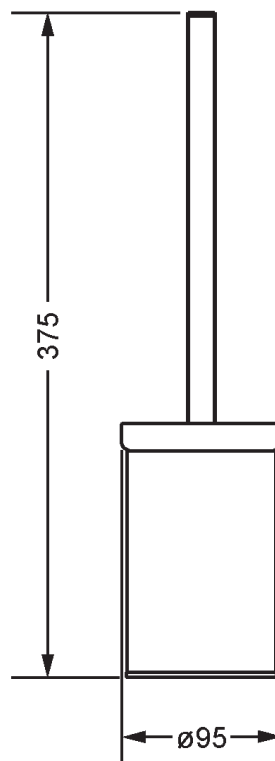

ELEVEN

649.00.414.xxx

Cosmetic mirror, inclusive lighting



- wall model
- swivelling and extendable
- magnification 3:1
- direct connection
- mirror $\varnothing$ 185 mm
- frame $\varnothing$ 250 mm
- touch control of the background light

