



## RAINHEAVEN

649.14.640.xxx

Rainheaven 610 x 610 mm

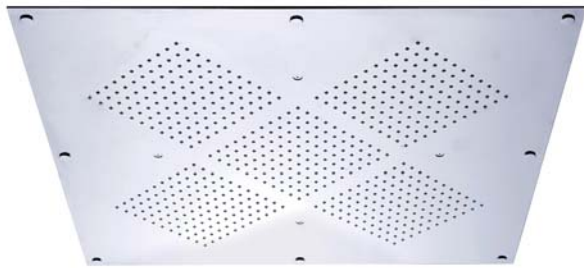

- 605 jets with anticalcareous system
- 2 mm ultra-thin stainless steel
- easy to mount and maintain
- jet types: rainfall, atomizer
- jet zones: body zone - perimetral rain shower zone, rain zone - internal rain shower zone, complete zone, atomizer zone
- control of the 3 jet zones must be carried out by 3 valves:
  - 1 valve - outer 4 zones,
  - 2 valve - inner zone, 1 and 2 simultaneously - all 5 zones,
  - 3 valve - atomizer zone
- flow rate of rainfall 26,6 l/min at 3 bar
- flow rate of atomizer 2,4 l/min at 3 bar
- fixing material for mounting is included in the packaging
- designed for ceiling installation

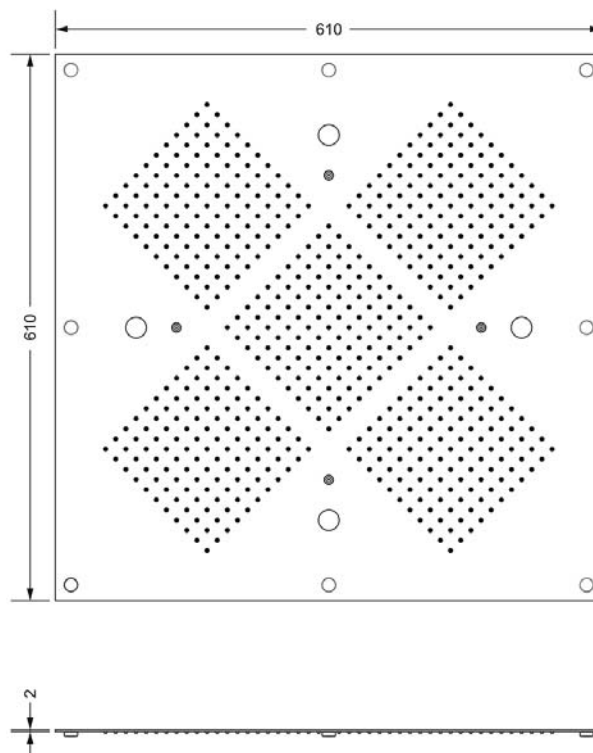

## RAINHEAVEN

649.14.645.xxx


Rainheaven 610 x 610 mm




blue  
rainfall  
inner zone



yellow  
rainfall  
inner zone




indigo  
rainfall  
all 5 zones




orange  
atomizer




red  
rainfall  
outer 4 zones



violet  
rainfall  
outer 4 zones




green  
rainfall  
all 5 zones

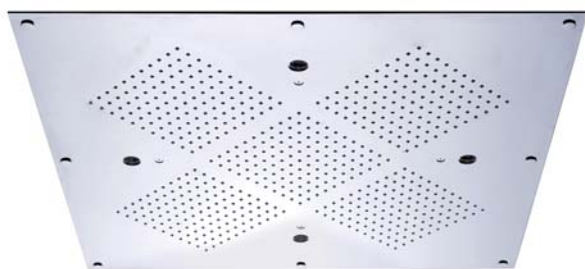

- with chromotherapy
- power LED: input voltage 85-260 V AC
- jet types: rainfall, atomizer
- jet zones: body zone - perimetral rain shower zone, rain zone - internal rain shower zone, complete zone, atomizer zone
- control of the 3 jet zones must be carried out by 3 valves:
  - 1 valve - outer 4 zones,
  - 2 valve - inner zone, 1 and 2 simultaneously - all 5 zones
  - 3 valve - atomizer zone
- flow rate rainfall 26,6 l/min at 3 bar
- flow rate atomizer 2,4 l/min at 3 bar
- fixing material for mounting is included in the packaging
- designed for ceiling installation

### Required:


- **649.14.745.xxx** | Switch control for chromotherapy

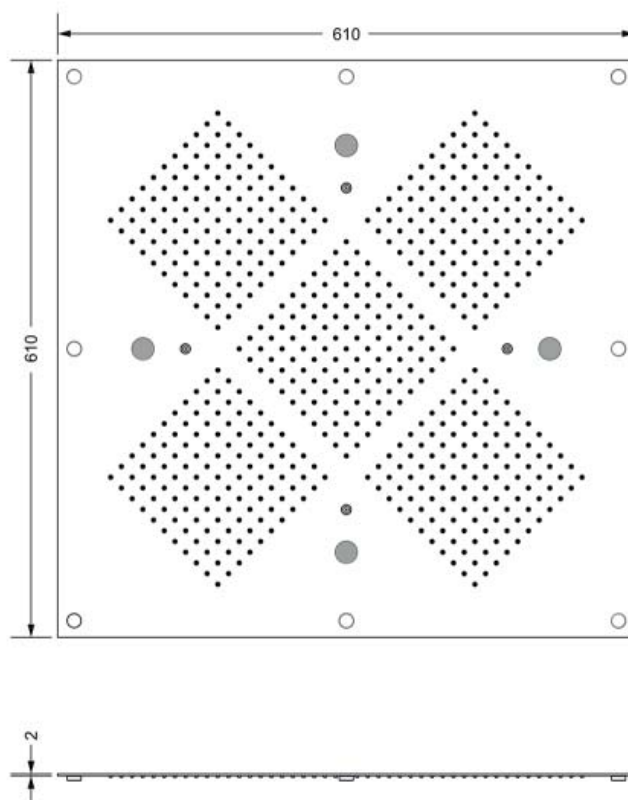


## RAINHEAVEN

649.14.650.xxx

Rainheaven 610 x 610 mm

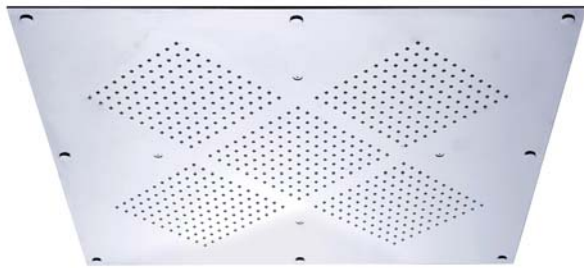

- 605 jets with anticalcareous system
- 2 mm ultra-thin stainless steel
- jet type: rainfall
- jet zones: body zone - perimetral rain shower zone, rain zone - internal rain shower zone, complete zone
- control of the 2 jet zones must be carried out by 2 valves:
  - 1 valve - external 4 zones
  - 2 valve - internal zone, 1 and 2 together - all 5 zones
- flow rate of rainfall 26,6 l/min at 3 bar
- fixing material for mounting is included in the packaging
- designed for ceiling installation

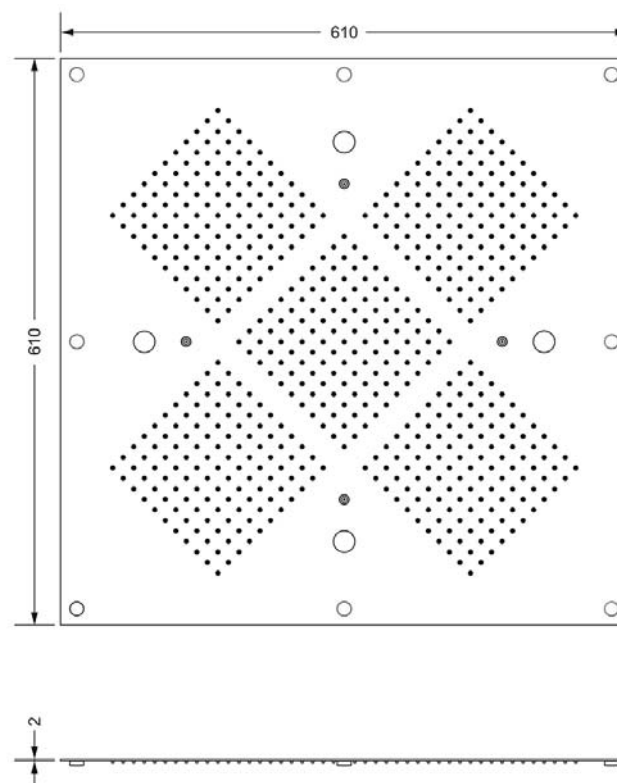

## RAINHEAVEN

649.14.655.xxx


Rainheaven 610 x 610 mm



blue  
rainfall  
inner zone




yellow  
rainfall  
inner zone




indigo  
rainfall  
all 5 zones




red  
rainfall  
outer 4 zones



violet  
rainfall  
outer 4 zones





green  
rainfall  
all 5 zones

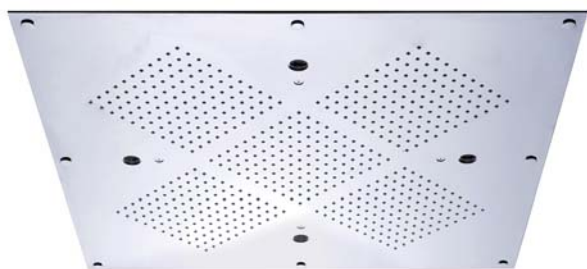

- with chromotherapy
- 605 jets with anticalcareous system
- 2 mm ultra-thin stainless steel
- jet type: rainfall
- jet zones: body zone - perimetral rain shower zone, rain zone - internal rain shower zone, complete zone
- control of the 2 jet zones must be carried out by 2 valves:
  - 1 valve - external 4 zones,
  - 2 valve - internal zone, 1 and 2 together - all 5 zones
- flow rate of rainfall 26,6 l/min at 3 bar
- fixing material for mounting is included in the packaging
- designed for ceiling installation

### Required:

- **649.14.745.xxx** | Switch control for chromotherapy

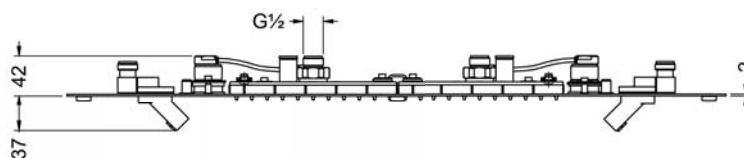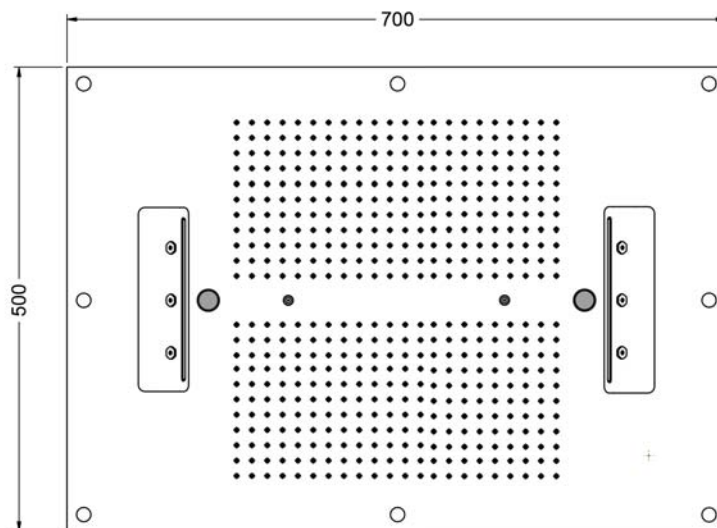


## RAINHEAVEN

649.14.660.xxx

Rainheaven 700 x 500 mm





- 484 jets with anticalcareous system
- 2 mm ultra-thin stainless steel
- jet types: rainfall, cascade, atomizer
- control of the 4 jet zones must be carried out by 4 valves:
  - 1 valve - rainfall (two segments)
  - 2 valve - cascade left
  - 3 valve - cascade right
  - 4 valve - atomizer
- flow rate rainfall 26,6 l/min at 3 bar
- flow rate cascade 19 l/min at 3 bar
- flow rate atomizer 1,2 l/min at 3 bar
- fixing material for mounting is included in the packaging
- designed for ceiling installation

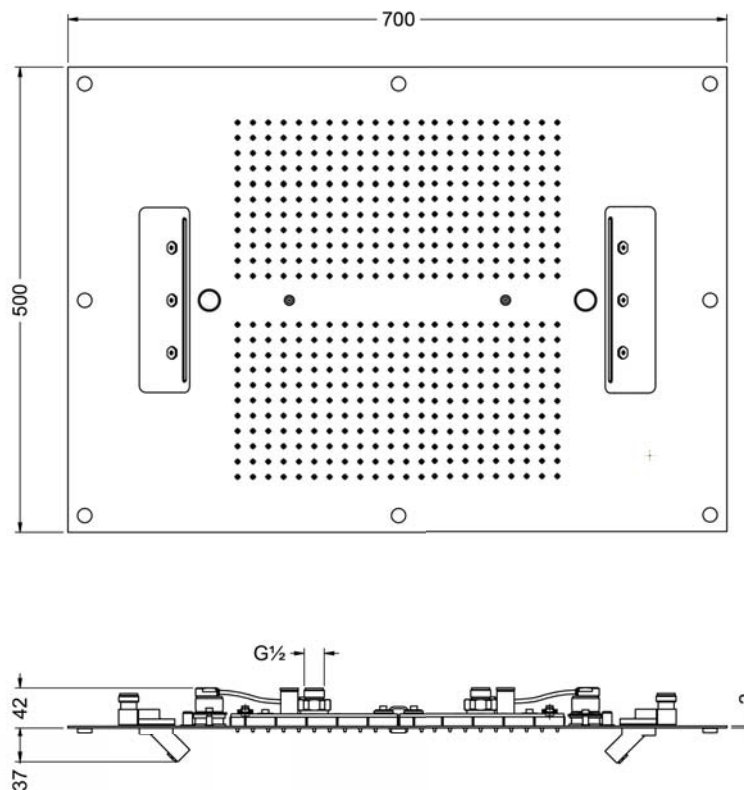

## RAINHEAVEN

649.14.665.xxx


Rainheaven 700 x 500 mm

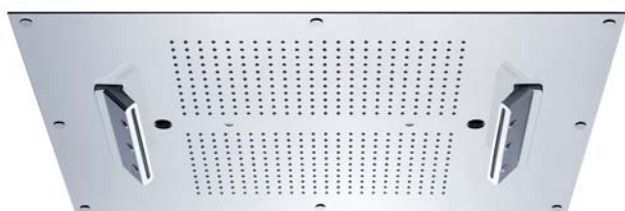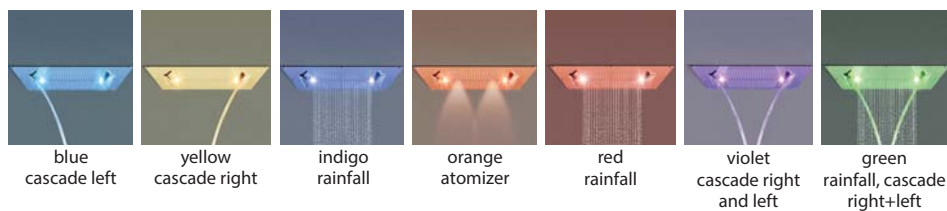

- with chromotherapy
- power LED: input voltage 85-260 V AC
- 484 jets with anticalcareous system
- 2 mm ultra-thin stainless steel
- jet types: rainfall, cascade, atomizer
- control of the 4 jet zones must be carried out by 4 valves:
  - 1 valve - rainfall (two segments)
  - 2 valve - cascade left
  - 3 valve - cascade right
  - 4 valve - atomizer
- flow rate rainfall 26,6 l/min at 3 bar
- flow rate cascade 19 l/min at 3 bar
- flow rate atomizer 1,2 l/min at 3 bar
- fixing material for mounting is included in the packaging
- designed for ceiling installation

### Required:

- **649.14.745.xxx** | Switch control for chromotherapy

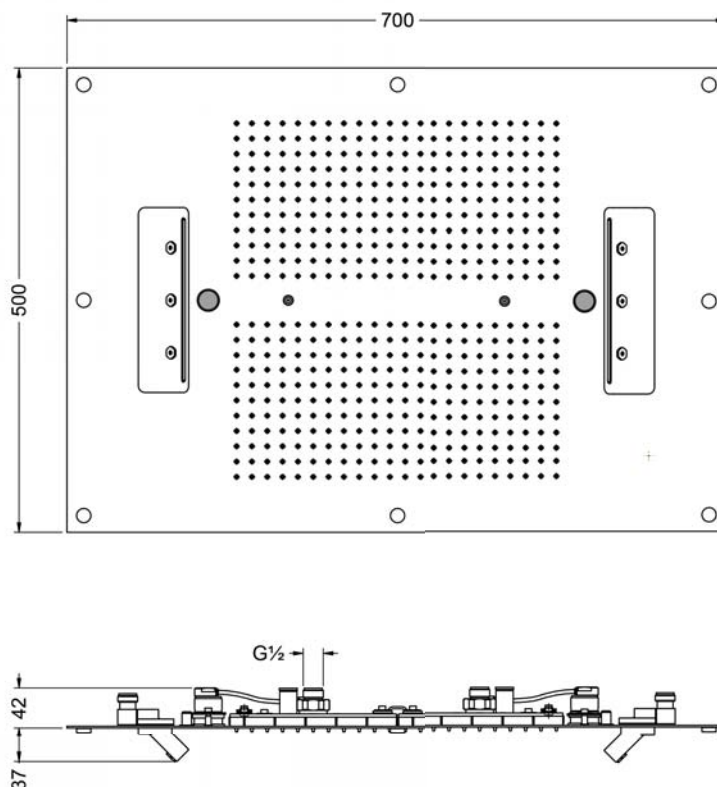


## RAINHEAVEN

649.14.670.xxx

Rainheaven 700 x 500 mm





- 484 jets with anticalcareous system
- 2 mm ultra-thin stainless steel
- jet types: rainfall, cascade right, cascade left
- control of the 3 jet zones must be carried out by 3 valves:
  - 1 valve - rainfall, two central segments,
  - 2 valve - cascade left,
  - 3 valve - cascade right
- flow rate rainfall 26,6 l/min at 3 bar
- flow rate cascade 19 l/min at 3 bar
- fixing material for mounting is included in the packaging
- designed for ceiling installation

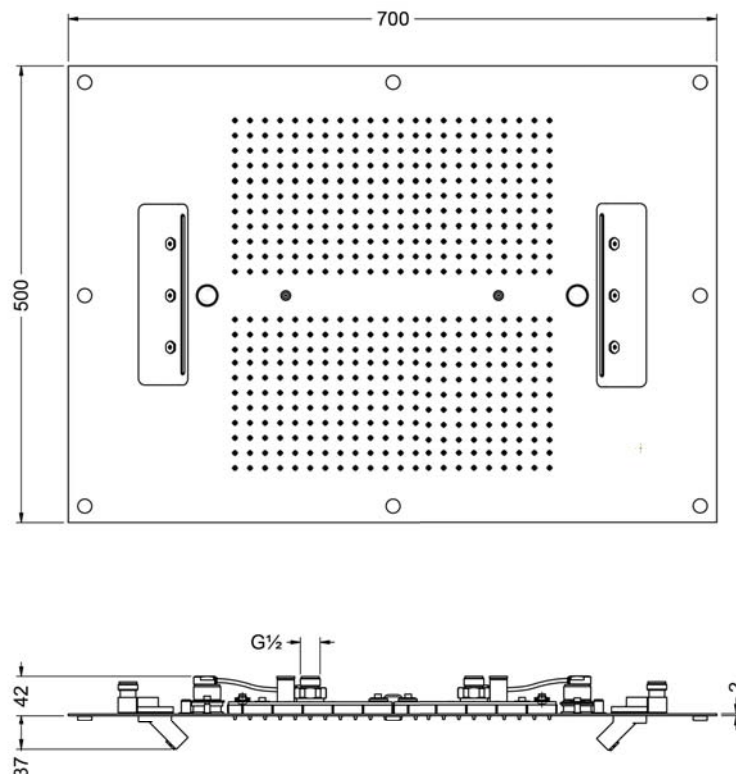

## RAINHEAVEN

649.14.675.xxx



Rainheaven 700 x 500 mm

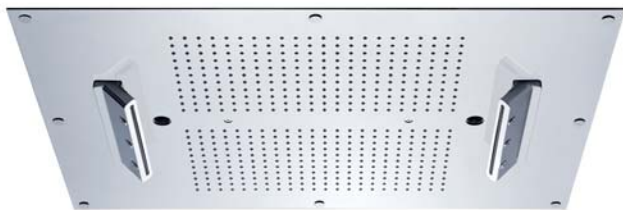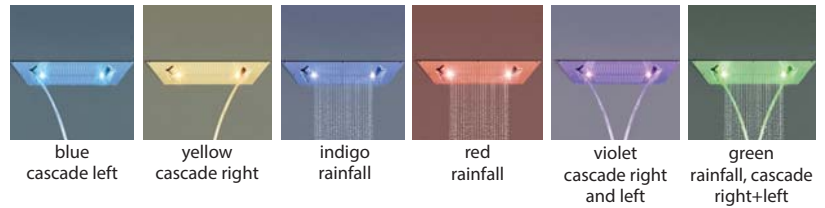

- with chromotherapy
- power LED: input voltage 85-260 V AC
- 484 jets with anticalcareous system
- 2 mm ultra-thin stainless steel
- jet types: rainfall, cascade right, cascade left
- control of the 3 jet zones must be carried out by 3 valves:
  - 1 valve - rainfall, two central segments,
  - 2 valve - waterfall left,
  - 3 valve - waterfall right
- flow rate rainfall 26,6 l/min at 3 bar
- flow rate cascade 19 l/min at 3 bar
- fixing material for mounting is included in the packaging
- designed for ceiling installation

### Required:

- **649.14.745.xxx** | Switch control for chromotherapy

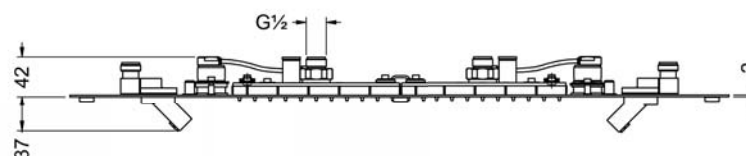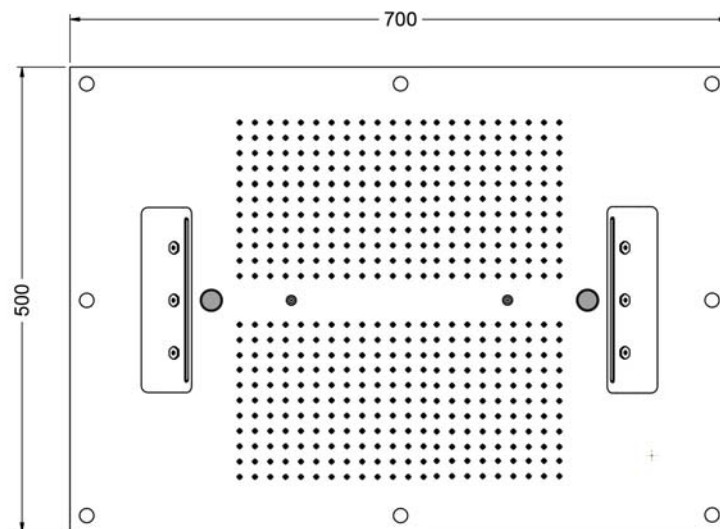


## RAINHEAVEN

649.14.745.xxx

Switch control for chromotherapy




- metal plate with one button
- 3 metre long connection cable
- input voltage 4.5 V
- for installation of rain heaven 610 x 610 mm and 700 x 500 mm

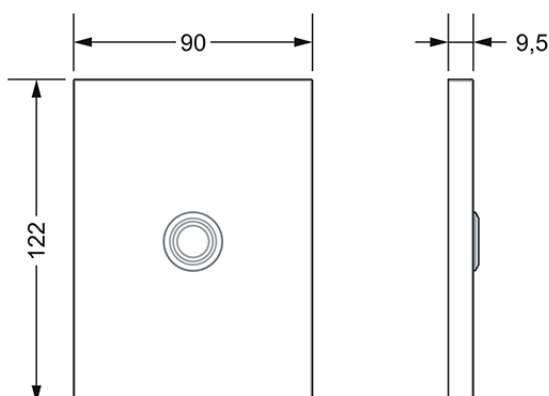

## SHOWERS



649.13.974.xxx

Rain shower head ½", 240 x 240 mm

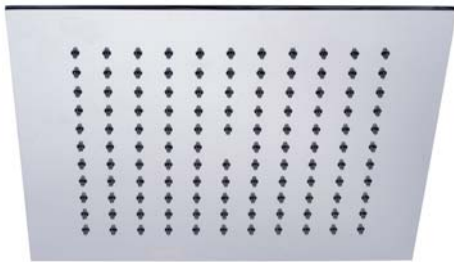

- full metal body
- 3 mm ultra-thin
- with ball joint
- with anticalcareous system
- flow rate 12 l/min at 3 bar
- without wall bracket


**Please order wall or ceiling bracket with the rain shower head separately.**

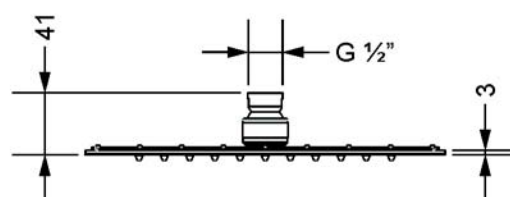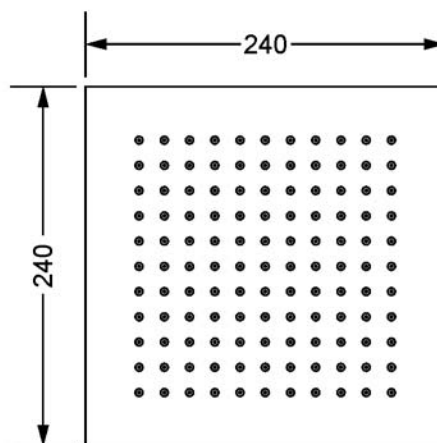

## SHOWERS



649.13.975.xxx

Rain shower head ½", 300 x 300 mm

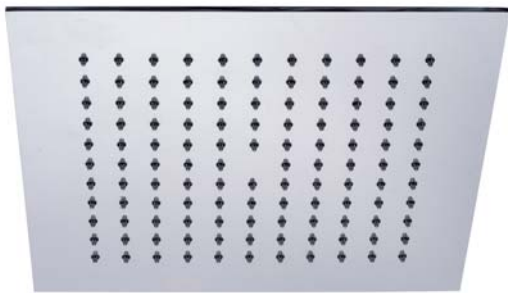

- full metal body
- 3 mm ultra-thin
- with ball joint
- with anticalcareous system
- flow rate 13,5 l/min at 3 bar
- without wall bracket


**Please order wall or ceiling bracket with the rain shower head separately.**

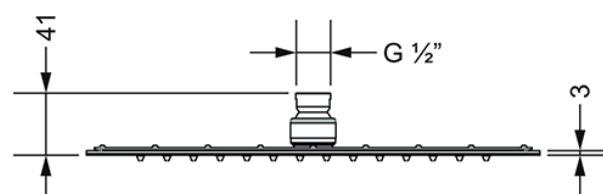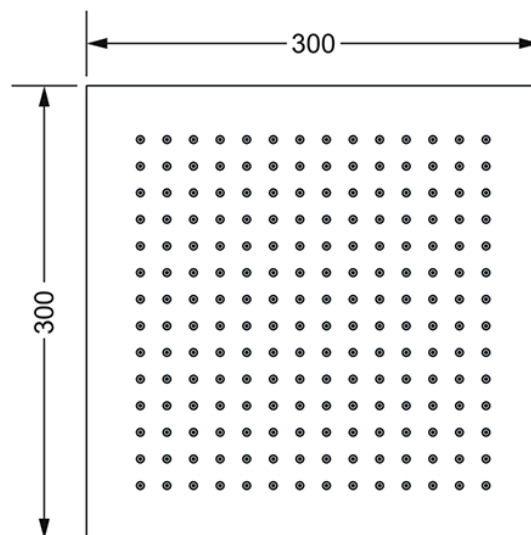

## SHOWERS


649.13.980.xxx

Rain shower head ½", 400 x 400 mm

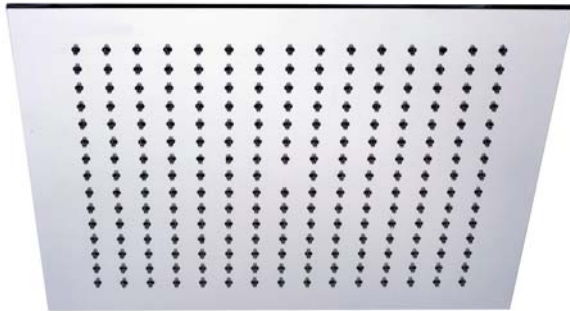

- full metal body
- 3 mm ultra-thin
- with ball joint
- with anticalcareous system
- flow rate 16 l/min at 3 bar
- without wall bracket

**Please order wall or ceiling bracket with the rain shower head separately.**

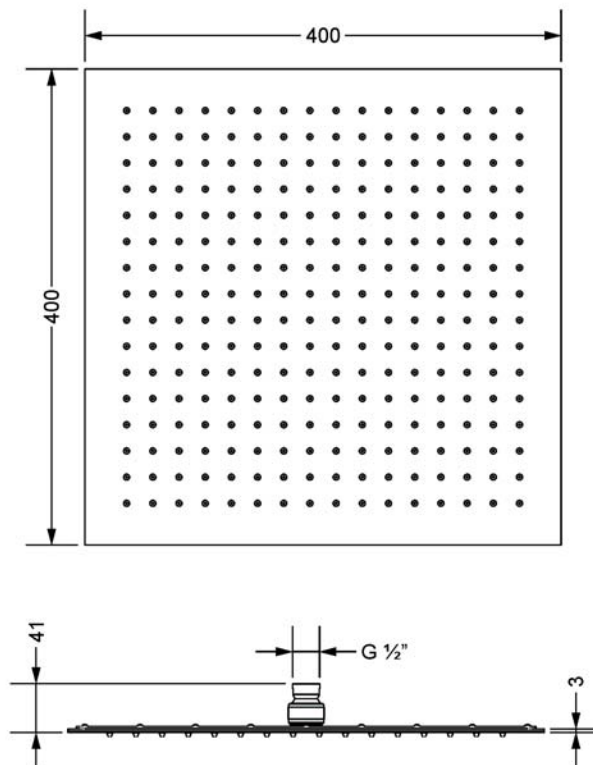

## SHOWERS


649.13.844.xxx

Rain shower head ½", ø 240 mm



- ø 240 mm
- full metal body
- 3 mm ultra flat
- with ball joint
- with anticalcareous system
- flow rate 12 l/min at 3 bar
- without wall bracket


**Please order wall or ceiling bracket with the rain shower head separately.**

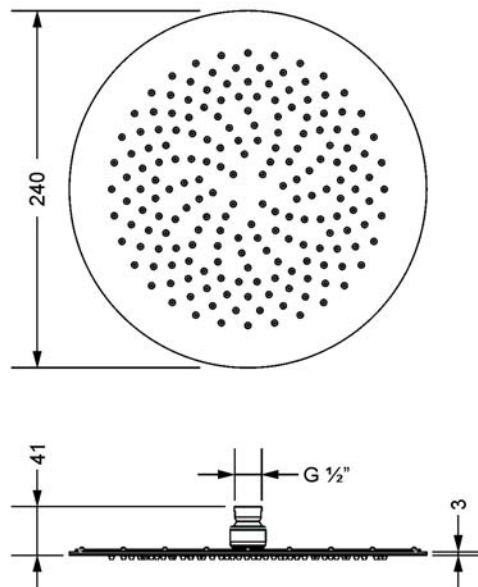

## SHOWERS


649.13.845.xxx

Rain shower head ½", Ø 300 mm

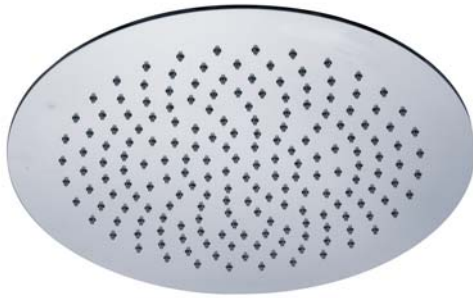

- full metal body
- 3 mm ultra-thin
- with ball joint
- with anticalcareous system
- flow rate 13,5 l/min at 3 bar
- without wall bracket


**Please order wall or ceiling bracket with the rain shower head separately.**

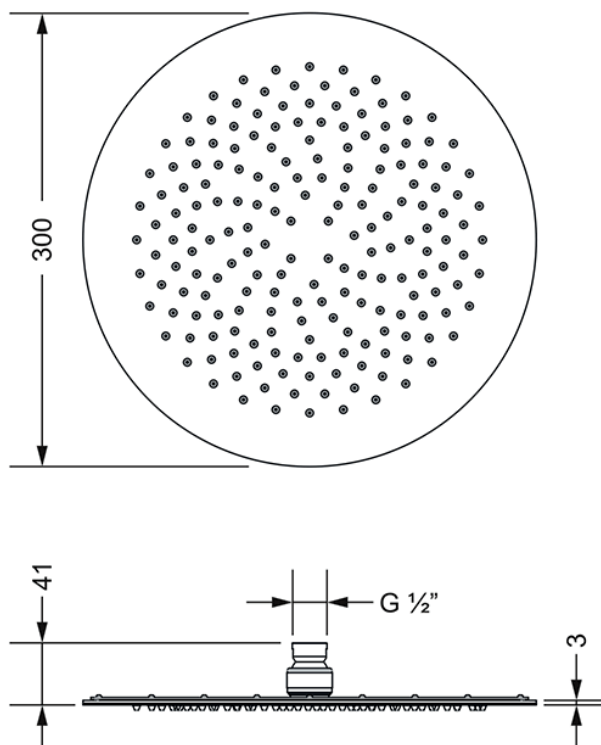

## SHOWERS


649.13.850.xxx

Rain shower head ½", ø 400 mm

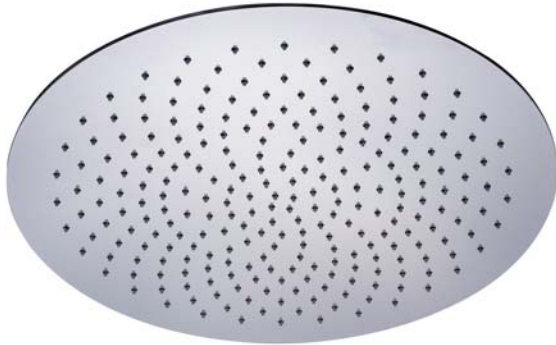

- full metal body
- 3 mm ultra-thin
- with ball joint
- with anticalcareous system
- flow rate 16 l/min at 3 bar
- without wall bracket

**Please order wall or ceiling bracket with the rain shower head separately.**

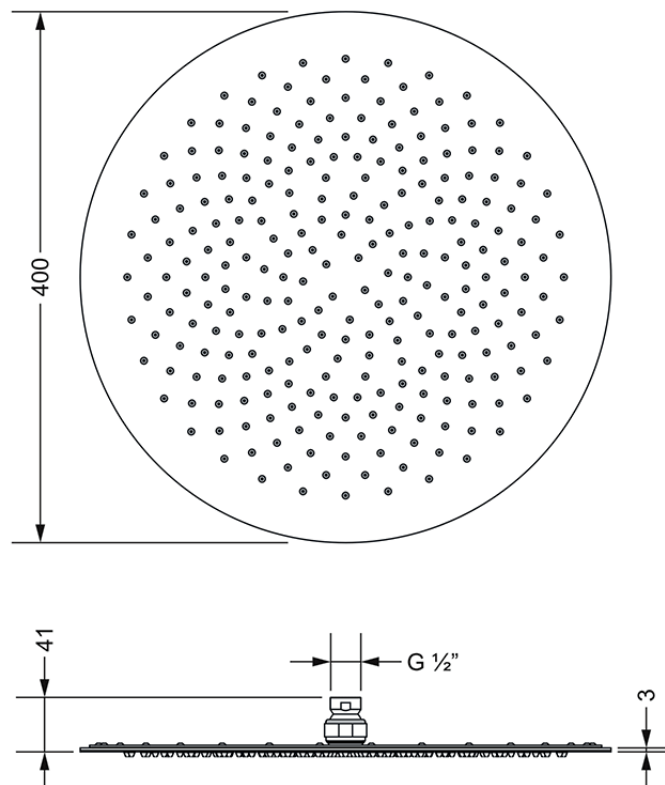

## SHOWERS


649.13.880.xxx

Rain shower head ½", ø 300 mm



- full metal body
- with ball joint
- anticalcareous system
- flow rate 16 l/min at 3 bar
- without wall bracket

**Please order wall or ceiling bracket with the rain shower head separately.**

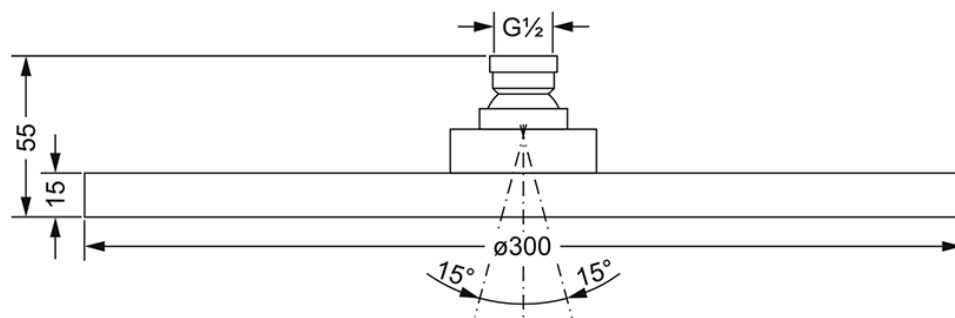

## SHOWERS


649.13.870.xxx

Rain shower head ½", ø 200 mm



- full metal body
- with ball joint
- anticalcareous system
- flow rate 26 l/min at 3 bar
- without wall bracket

**Please order wall or ceiling bracket with the rain shower head separately.**

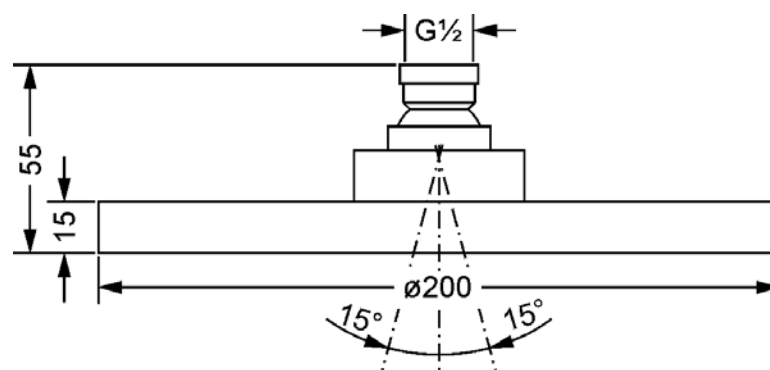

## SHOWERS


649.13.885.xxx

Rain shower head ½", Ø 250 mm



- material metal
- with ball joint
- with anticalcareous system
- flow rate 11 l/min at 3 bar
- without wall bracket

**Please order wall or ceiling bracket with the rain shower head separately.**

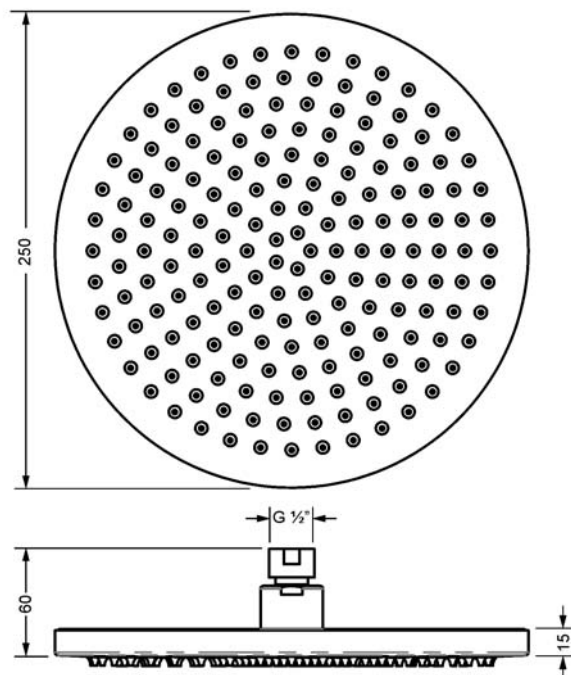

## SHOWERS


649.13.930.xxx

Rain shower head 1/2", ø 300 mm



- full metal body
- with ball joint
- anticalcareous system
- flow rate 16 l/min at 3 bar
- without wall bracket

**Please order wall or ceiling bracket with the rain shower head separately.**

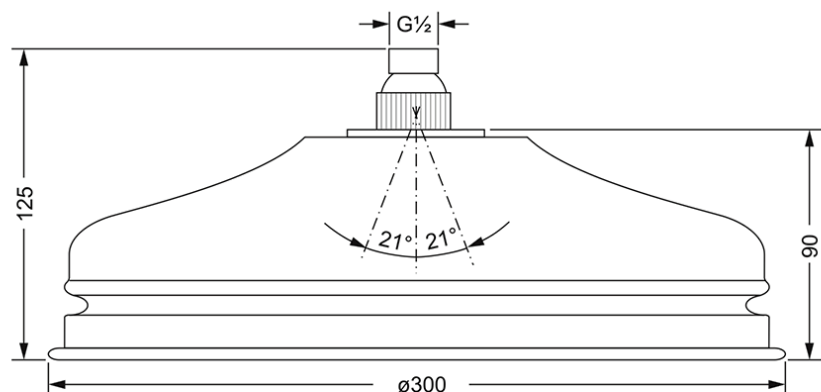

## SHOWERS


649.13.920.xxx

Rain shower head 1/2", Ø 200 mm



- full metal body
- with ball joint
- anticalcareous system
- flow rate 19 l/min at 3 bar
- without wall bracket

**Please order wall or ceiling bracket with the rain shower head separately.**

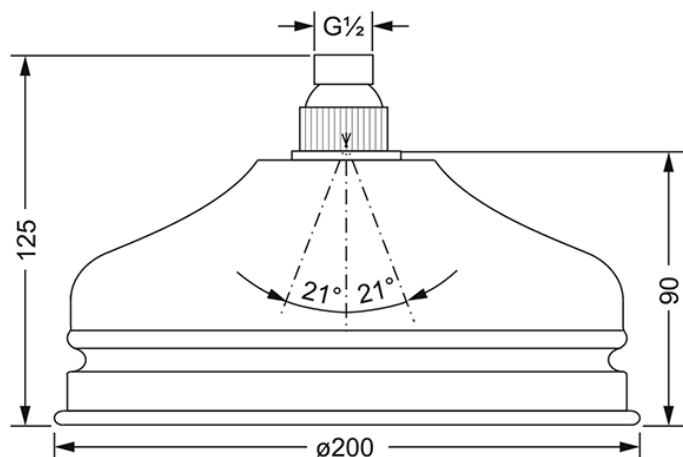

## SHOWERS



649.13.970.xxx

Rain shower head ½", 200 x 200 mm



- full metal body
- with ball joint
- anticalcareous system
- flow rate 26 l/min at 3 bar
- without wall bracket

**Please order wall or ceiling bracket with the rain shower head separately.**

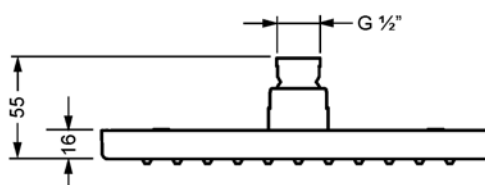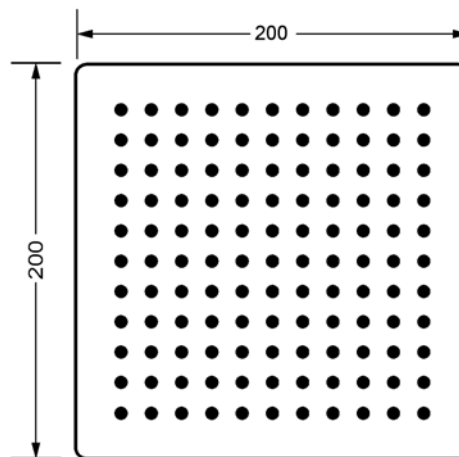

## SHOWERS


649.13.615.xxx

Body spray shower head 1/2"



- ø 230 mm
- 75 jets
- full metal
- anticalcareous system
- swivel shower head
- with ball joint
- flow rate 18 l/min at 3 bar
- without wall bracket

**Please order wall or ceiling bracket with the rain shower head separately.**

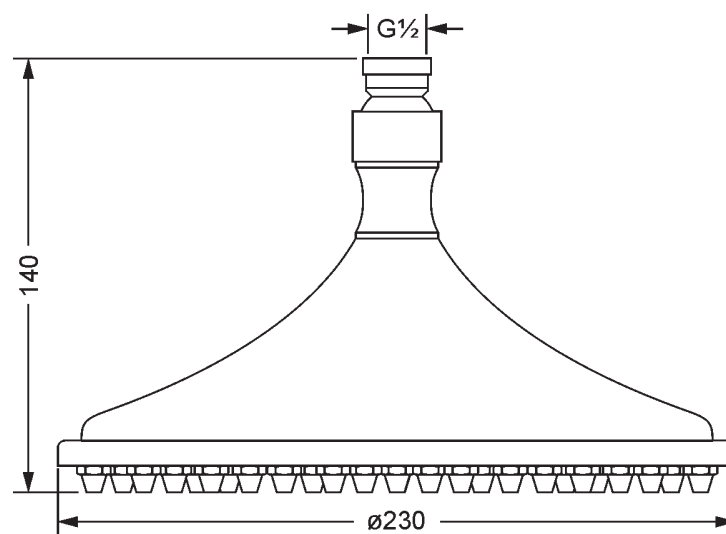


## SHOWERS

649.13.650.xxx

Shower head 1/2"



- wall mounting
- plastic
- 3 jet types: soft, rain, massage
- combinations of jet types possible
- anticalcareous system
- connection 1/2"
- flow rate soft jet 8,2 l/min at 3 bar
- flow rate rainfall 12 l/min at 3 bar
- flow rate massage jet 14,9 l/min at 3 bar
- with metal wall bracket

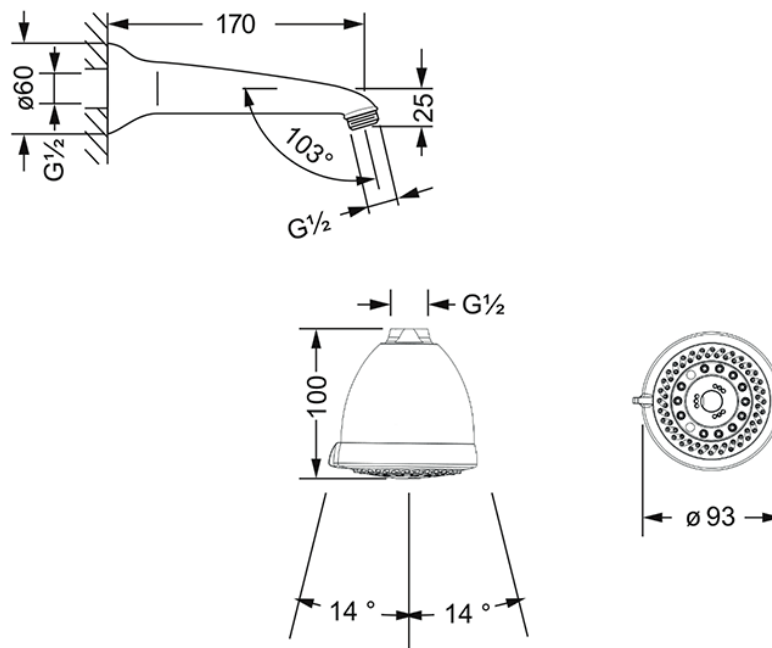


## SHOWERS

637.13.625.xxx

Wall bracket 1/2"


- wall mounting
- spout projection 400 mm

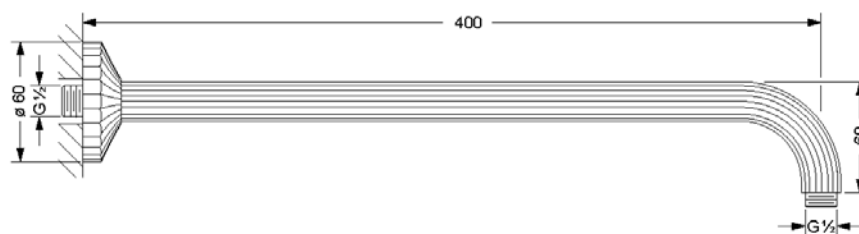

## SHOWERS

607.13.625.xxx  
Wall bracket 1/2"

- wall mounting
- projection 400 mm

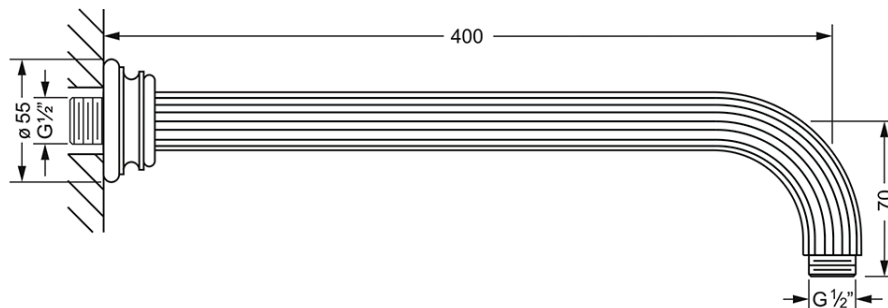


## SHOWERS

649.13.750.xxx

Wall bracket 1/2"

- wall mounting
- projection 500 mm

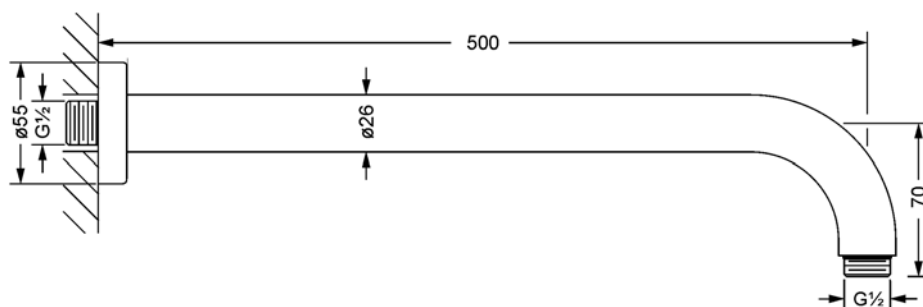


## SHOWERS

649.13.755.xxx

Wall bracket 1/2"

- wall mounting
- projection 350 mm

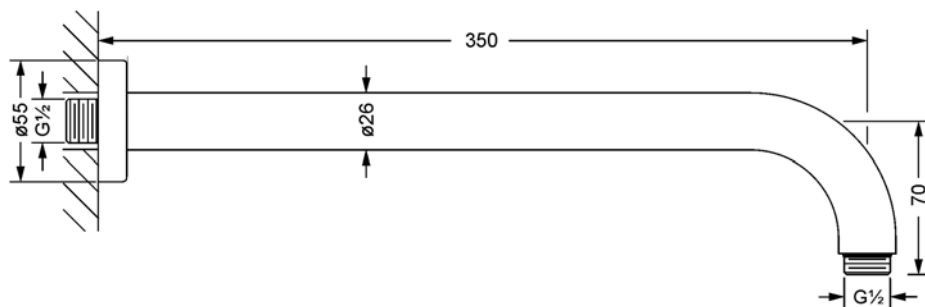


## SHOWERS

649.13.756.xxx

Wall bracket 1/2"

- wall mounting
- projection 350 mm

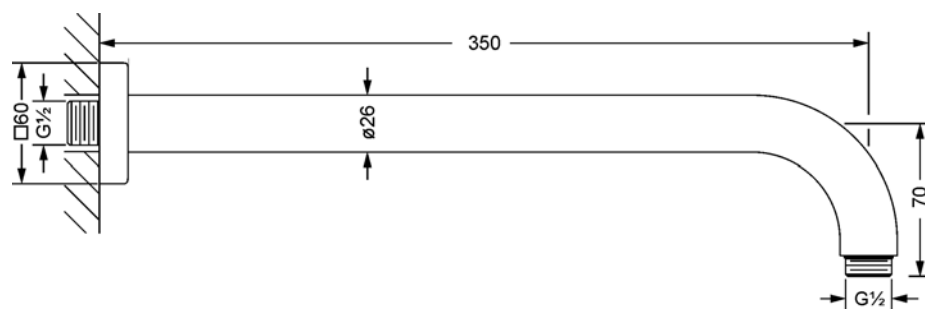


## SHOWERS

649.13.785.xxx

Wall bracket 1/2"

- wall mounting
- projection 350 mm

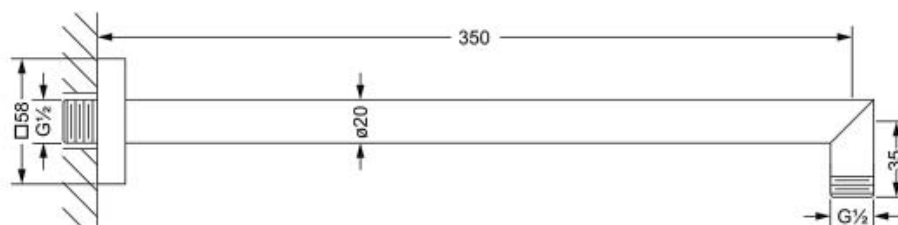


## SHOWERS

649.13.625.xxx

Wall bracket 1/2"

- wall mounting
- projection 162 mm

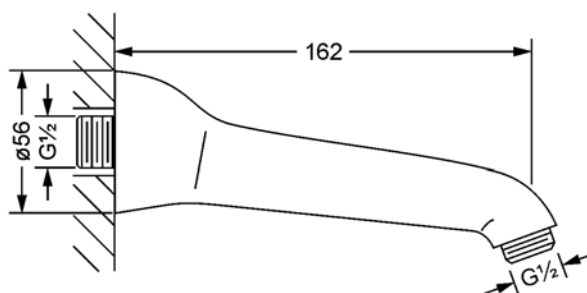


## SHOWERS

649.13.761.xxx

Reinforcement supply 1/2"

· ø 90 mm

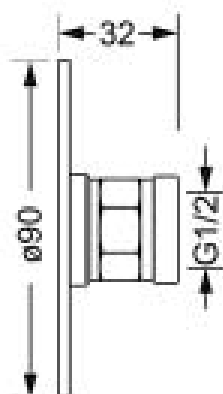


## SHOWERS

649.13.765.xxx

Ceiling bracket 1/2"

· length 330 mm

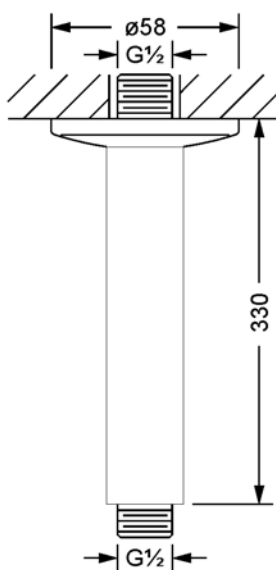


## SHOWERS

649.13.770.xxx

Ceiling bracket 1/2"

· length 190 mm

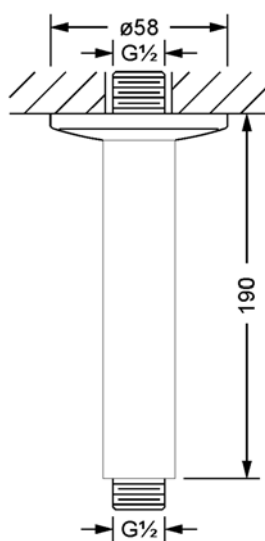


## SHOWERS

649.13.771.xxx

Ceiling bracket 1/2"

· length 150 mm

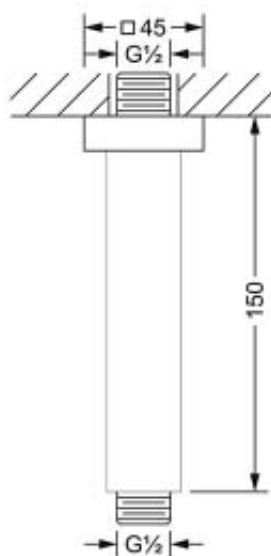


## SHOWERS

649.13.550.xxx

Body spray side shower 1/2"



- wall mounting
- escutcheon
- swivel shower head
- anticalcareous system
- 1 jet type
- flow rate 12 l/min at 3 bar

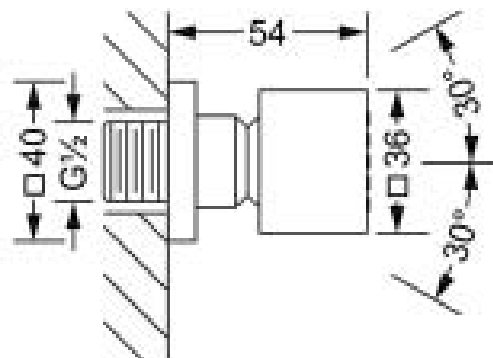


## SHOWERS

649.13.460.xxx

Body spray side shower ½"



- wall mounting
- escutcheon
- swivel shower head
- anticalcareous system
- 2 jet types: rainfall and massage jet
- water flow rate rainfall 12 l/min at 3 bar
- water flow rate for massage jet 14 l/min at 3 bar

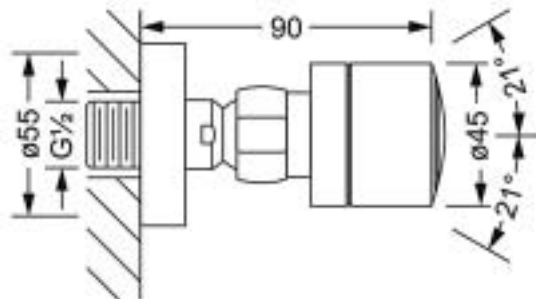


## SHOWERS

649.13.465.xxx

Body spray side shower ½"



- wall mounting
- escutcheon
- swivel shower head
- anticalcareous system
- 2 jet types: rainfall and massage jet
- water flow rate rainfall 12 l/min at 3 bar
- water flow rate for massage jet 14 l/min at 3 bar

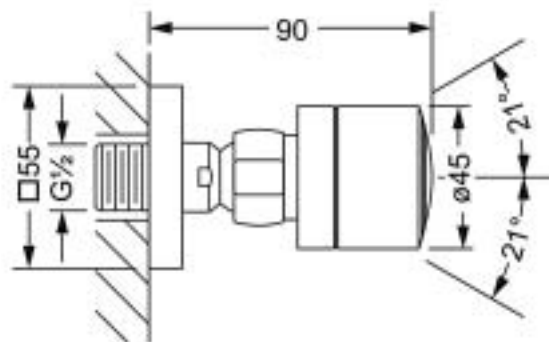


## SHOWERS

649.13.470.xxx

Body spray side shower 1/2"



- wall mounting
- escutcheon
- swivel shower head
- anticalcareous system
- 2 jet types: rainfall and massage jet
- water flow rate rainfall 12 l/min at 3 bar
- water flow rate for massage jet 14 l/min at 3 bar

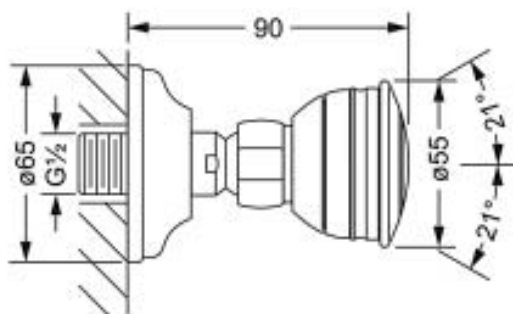


## SHOWERS

649.13.526.xxx

Body spray side shower 1/2"



- wall mounting
- escutcheon 125 x 125 mm
- material: plastic
- swivel shower head, 20°
- anticalcareous system
- flow rate 3,6 l/min at 3 bar

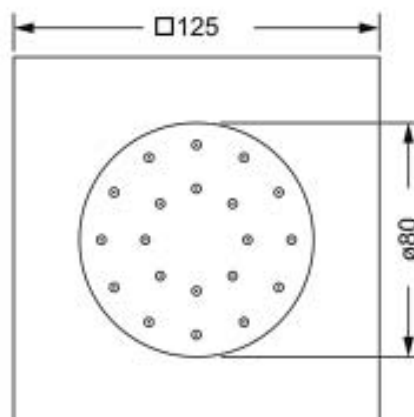


## SHOWERS

649.13.530.xxx

Body spray side shower 1/2"



- wall mounting
- escutcheon 125 x 125 mm
- material: plastic
- swivel shower head, 20°
- anticalcareous system
- flow rate 3,6 l/min at 3 bar

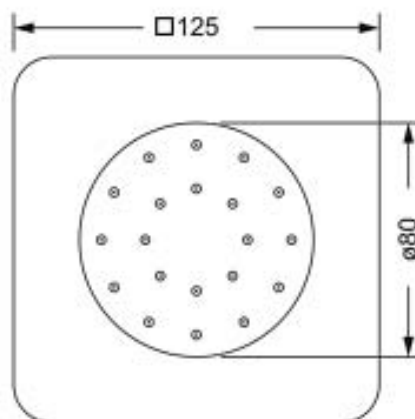


## SHOWERS

649.13.519.xxx

Body spray side shower 1/2"



- wall mounting
- escutcheon ø 130 mm
- material: plastic
- swivel shower head, 20°
- anticalcareous system
- flow rate 3,6 l/min at 3 bar

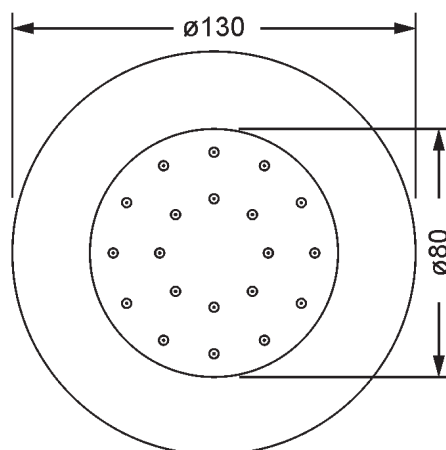


## SHOWERS

649.13.395.xxx

Hand shower 1/2"

- material plastic
- anticalcareous system
- connection 1/2"
- with 3 jets: normal, hydromassage, soft
- flow rate 10,5 l/min at 3 bar

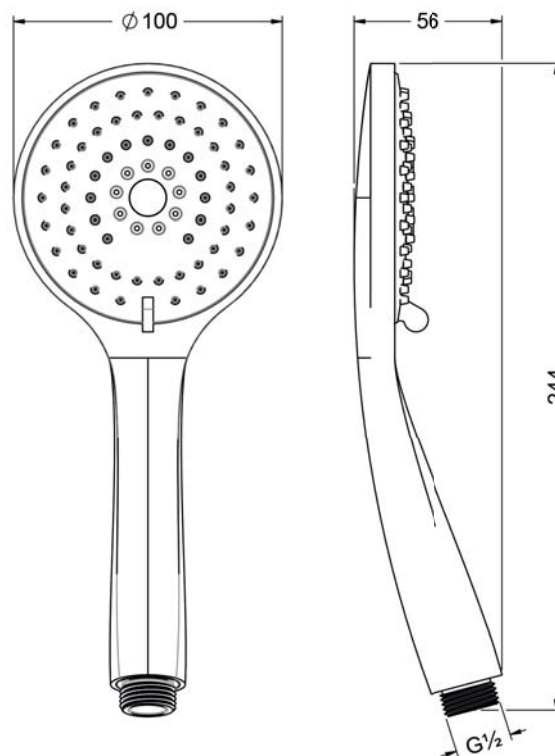


## SHOWERS

649.13.381.xxx

Hand shower 1/2"



- material plastic
- anticalcareous system
- connection 1/2"
- with 3 jets: normal, soft, cascade
- flow rate 8,6 l/min at 3 bar

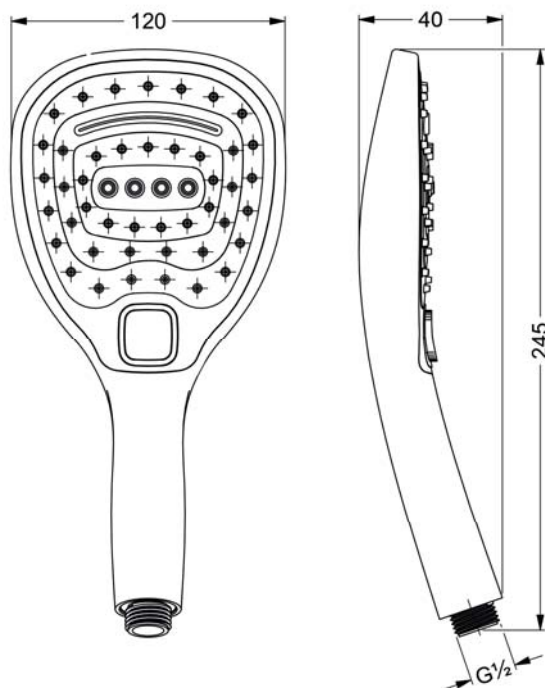



## SHOWERS

649.13.391.xxx

Hand shower 1/2"



- material metal
- anticalcareous system
- connection 1/2"
- 1-spray hand shower
- flow rate 13,2 l/min at 3 bar

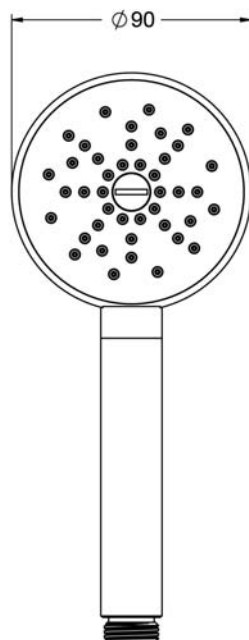


## SHOWERS

649.13.360.xxx

Hand shower 1/2"



- material metal
- anticalcareous system
- connection 1/2"
- 1-spray hand shower
- flow rate 12,8 l/min at 3 bar

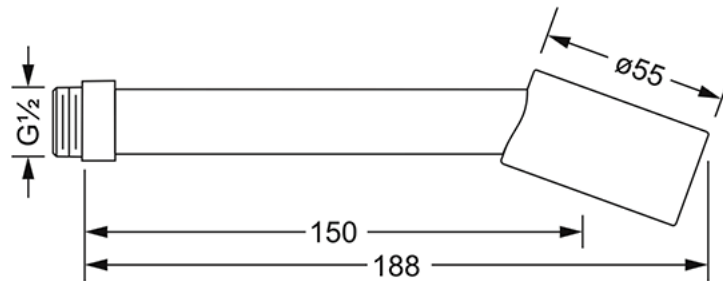


## SHOWERS

649.13.335.xxx

Hand shower 1/2"



- material metal
- anticalcareous system
- connection 1/2"
- 1-spray hand shower
- flow rate 22 l/min at 3 bar

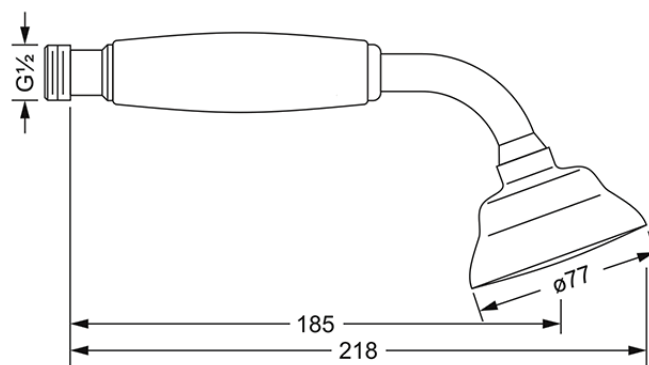


## SHOWERS

649.13.330.xxx

Hand shower 1/2"



- material metal
- anticalcareous system
- connection 1/2"
- 1-spray hand shower
- flow rate 14 l/min at 3 bar

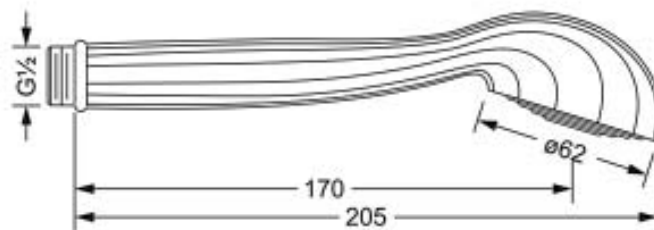


## SHOWERS

649.13.371.xxx

Hand shower 1/2"



- material metal
- anticalcareous system
- connection 1/2"
- 1-spray hand shower
- flow rate 22 l/min at 3 bar

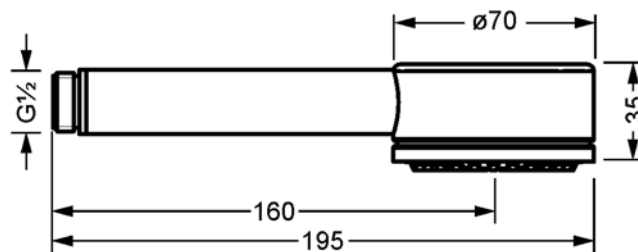



## SHOWERS

649.13.375.xxx

Hand shower 1/2"



- material metal
- anticalcareous system
- connection 1/2"
- 1-spray hand shower
- flow rate 24 l/min at 3 bar




## SHOWERS

649.13.361.xxx

Hand shower 1/2"



- material metal
- anticalcareous system
- connection 1/2"
- 1-spray hand shower
- flow rate 18 l/min at 3 bar





## SHOWERS

649.13.338.xxx

Spray hand shower 1/2"



- classical
- completely metal
- one jet
- push-lever operation
- flow rate with water limitation 6,9 l/min

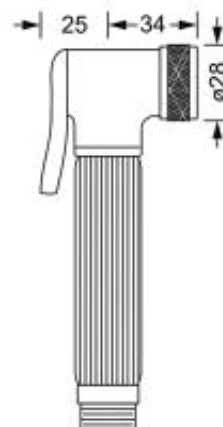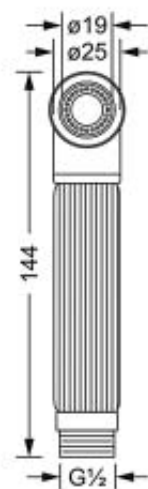



## SHOWERS

649.13.337.xxx

Spray hand shower ½"



- modern
- completely metal
- one jet
- push-lever operation
- flow rate with water limitation 6,9 l/min

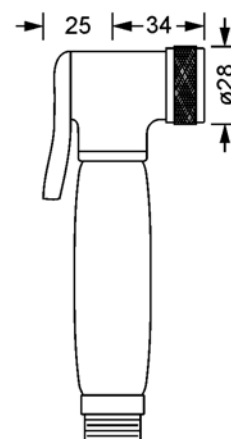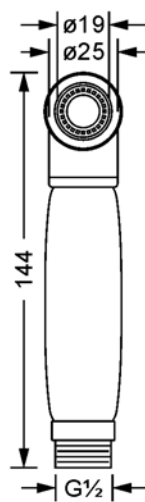

## SHOWERS

649.13.334.xxx

Spray hand shower 1/2"

- square
- completely metal
- one jet
- push-lever operation
- flow rate with water limitation 6,9 l/min

